
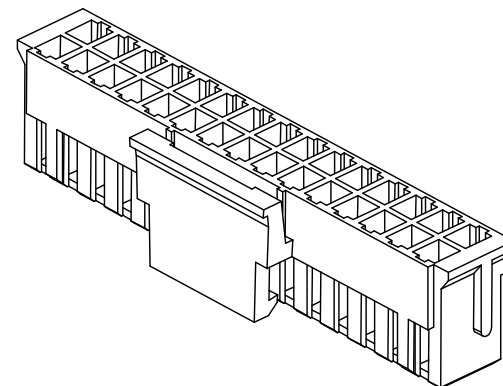

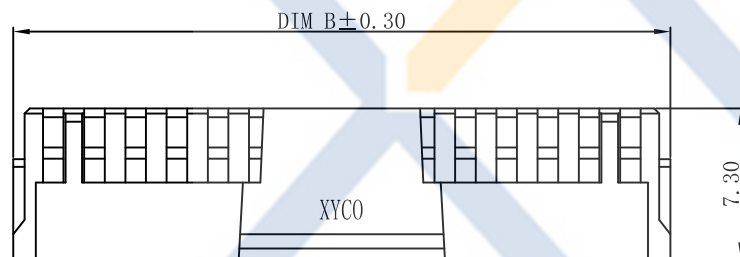


DRAWING FOR CUSTOMER

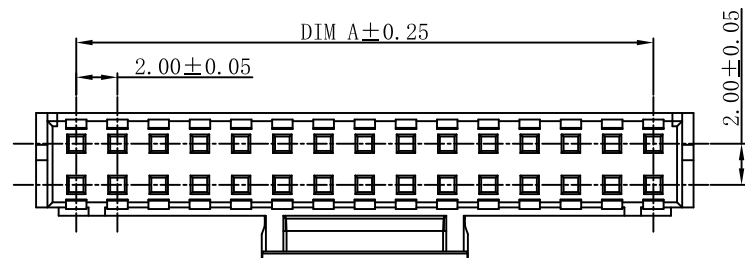

- SPEC.:
- Rated Voltage:250V AC,DC
 - Rated Current:3A AC,DC
 - Withstand Voltage:800V AC/minute
 - Contact Resistance:20mΩ max
 - Insulation Resistance:1000MΩ min
 - Temperature Range:-25℃~+85℃

- Material:
- Insulator:PA66 UL94V-0
 - Color:Natural (White)

Poles	Dimensions (mm)	
	A	B
2X08	14.00	17.90
2X09	16.00	19.90
2X10	18.00	21.90
2X11	20.00	23.90
2X12	22.00	25.90
2X13	24.00	27.90
2X14	26.00	29.90
2X15	28.00	31.90
2X16	30.00	33.90
2X17	32.00	35.90
2X18	34.00	37.90
2X19	36.00	39.90
2X20	38.00	41.90
2X21	40.00	43.90
2X22	42.00	45.90

KB939-D XX H L 1 A-X

Double row

Pin No.


Housing

XYCO

Version

Mold No.

With Lock

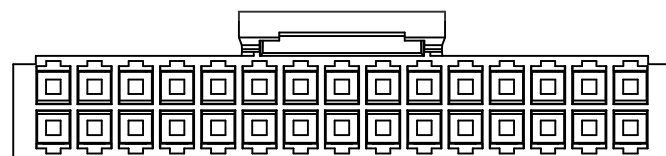

XYCO 东莞市轩业电子科技有限公司
TEL: 0769-8297 9981/2/3 <http://www.XYCO.com.cn>

DATE 日期	VER 版本	CHANGE HISTORY 變更歷史	CHANGED NAME 修改後料號	DRAWING 變更者	TOLERANCE 公差	DRAWING 設計者	Devin	KB939-DXXHL1A-X
2013-05-27	A		KB939-DXXHL1A-X	Devin	.X=±0.30 .XX=±0.20 .XXX=±0.10	CHECKED 審查	Thomas	PART NO. 料號
						APPROVED 核准	William	DWG NO. 圖號 PE2108A

UNIT 單位	mm	PRODUCT NAME 產品名稱
		PHC PH2.00mm Wire To Board Housing with lock