
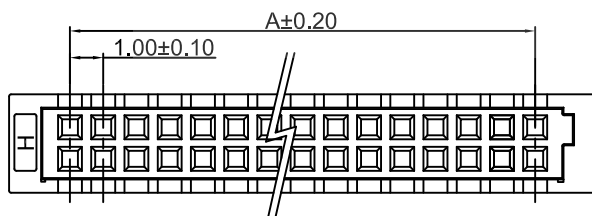

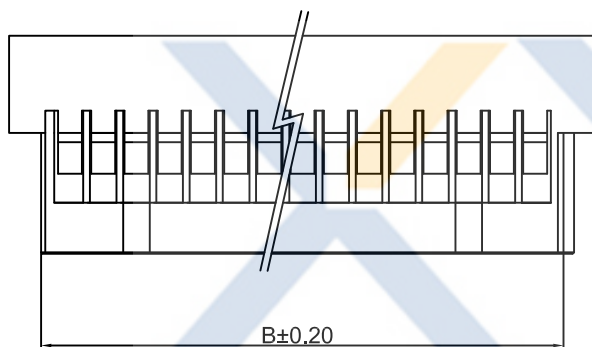


DRAWING FOR CUSTOMER

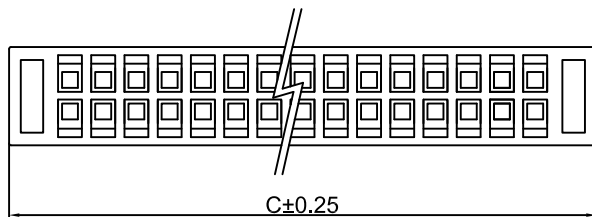

■SPEC.:

- Rated Voltage:50V AC,DC
- Rated Current:1A AC,DC
- Withstand Voltage:500V AC/minute
- Contact Resistance:20mΩ max
- Insulation Resistance:100MΩ min
- Temperature Range:-20°C~+85°C

■Material:

- Insulator: PA66 UL94V-0
- Color:Beige

KB9901-D X X H 1 B

Double row

Pin No.

Housing

Version

Mold No.

Precision Connectors

Poles	Dimension(mm)		
	A	B	C
20	9.00	11.00	13.60
30	14.00	16.00	18.60
40	19.00	21.00	23.60
50	24.00	26.00	28.60

2015-04-13	B	优化产品	KB9901-DXXH1B	Devin	TOLERANCE 公差	DRAWING 設計者	Devin	KB9901-DXXH1B	
2013-07-28	A		KB9901-DXXH1A	Devin	.X=±0.30 .XX=±0.20 .XXX=±0.10	CHECKED 審查	Thomas	PART NO. 料號	
DATE 日期	VER 版本	CHANGE HISTORY 變更歷史	CHANGED NAME 修改後料號	DRAWING 變更者		APPROVED 核准	William	DWG NO. 圖號	PE4202A

XYCO 东莞市轩业电子科技有限公司
TEL: 0769-8297 9981/2/3 <http://www.XYCO.com.cn>

UNIT 單位	mm	PRODUCT NAME 產品名稱	88252 PH1.0mm Wire To Board Housing
------------	----	----------------------	--