

# DRAWING FOR CUSTOMER

KBP25418-XX X DR 4 A

Pin No.

包裝方式:

- T:TUBE (管裝)
- R:REEL (卷裝)
- P: PE (袋裝)
- A:TRAY (盒裝)

Version

Mold No.

R:Right Angle  
V:Vertical

S:SMT





D:DIP

■SPEC.:

- Rated Current:3.0A AC,DC
- Withstand Voltage:1000V AC/minute
- Insulation Resistance:1000MΩ min
- Contact Resistance: 20mΩ Max
- Temperature Range:-40°C~+105°C

■Material:

- Insulator Material:PBT UL94V-0
- Contact Material:Brass
- Finish:Gold-plated,over Nickel
- Max. Processing Temp:200°C for 30-60seconds  
(220°C for 5seconds)

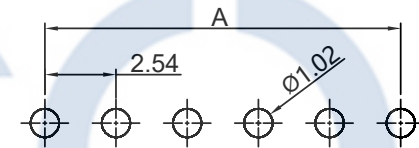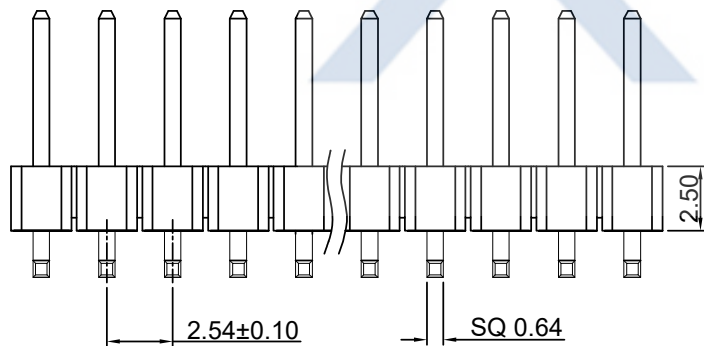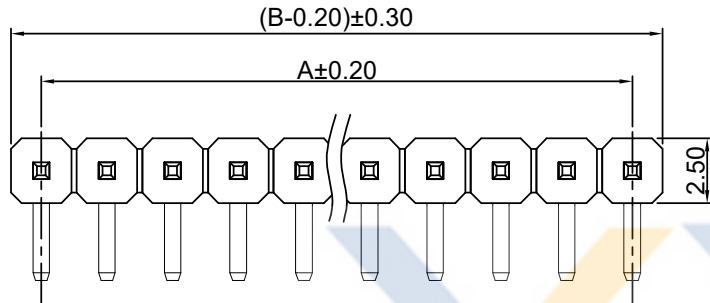


Recommended P.C.Board  
Hole Layout  
(Tolerance:±0.05)

Poles	A	B	Poles	A	B	Poles	A	B	Poles	A	B
1	—	2.54	11	25.40	27.94	21	50.80	53.34	31	76.20	78.74
2	2.54	5.08	12	27.94	30.48	22	53.34	55.88	32	78.74	81.28
3	5.08	7.62	13	30.48	33.02	23	55.88	58.42	33	81.28	83.82
4	7.62	10.16	14	33.02	35.56	24	58.42	60.96	34	83.82	86.36
5	10.16	12.70	15	35.56	38.10	25	60.96	63.50	35	86.36	88.90
6	12.70	15.24	16	38.10	40.64	26	63.50	66.04	36	88.90	91.44
7	15.24	17.78	17	40.64	43.18	27	66.04	68.58	37	91.44	93.98
8	17.78	20.32	18	43.18	45.72	28	68.58	71.12	38	93.98	96.52
9	20.32	22.86	19	45.72	48.26	29	71.12	73.66	39	96.52	99.06
10	22.86	25.40	20	48.26	50.80	30	73.66	76.20	40	99.06	101.60

**XYCO** 东莞市轩业电子科技有限公司  
TEL: 0769-8297 9981/2/3 <http://www.XYCO.com.cn>

2020-08-11		A			TOLERANCE 公差	DRAWING 設計者	Devin	KBP25418-XXXDR4A	
DATE 日期	VER 版本	CHANGE HISTORY 變更歷史	CHANGED NAME 修改後料號	DRAWING 變更者	.X=±0.30 .XX=±0.20 .XXX=±0.10	CHECKED 審查	Thomas	PART NO. 料號	
						APPROVED 核准	William	DWG NO. 圖號	PE211212A



UNIT  
單位

mm

PRODUCT NAME  
產品名稱

PH2.54 MALE HEADER SINGLE ROWS DIP TYPE  
RIGHT ANGLE BASE PC3.0 PA6.0 PB6.9