DRAWING FOR CUSTOMER

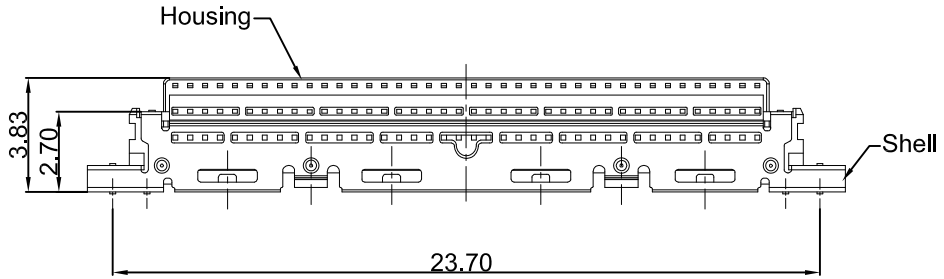



■SPEC.:
- ●Rated Voltage:100V AC,DC
- ●Rated Current:1A AC,DC
- ●Withstand Voltage:250V AC/minute
- ●Contact Resistance:50mΩ max
- ●Insulation Resistance:1000MΩ min
- ●Temperature Range:-40℃~+85℃

■Material:
- ●Insulator:LCP UL94V-0,Black
- ●Contact Pin: Phospher Bronze
  Finish:Gold-plated,over Nickel
- ●Shell:Phospher Bronze
  Finish:Gold-plated,over Nickel

KB501-XX H 5 B-R 1

- Pin No.
- Housing
- Mold No.
- Lengther
- Compal
- Version

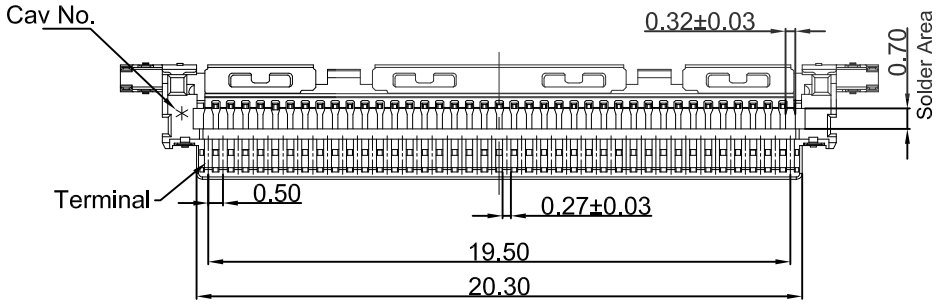

XYCO
Precision Connectors

Poles	A	B	C	D
30	18.84	21.00	14.50	15.30
40	23.70	25.40	19.50	20.30
50	28.70	30.40	24.50	25.30

DATE 日期	VER 版本	CHANGE HISTORY 變更歷史	CHANGED NAME 修改後料號	DRAWING 變更者
2013-12-03	B		KB501-XXH5B-R1	Devin

TOLERANCE 公 差: .X=±0.30, .XX=±0.20, .XXX=±0.10

DRAWING 設計者: Devin
CHECKED 審查: Thomas
APPROVED 核准: William

KB501-XXH5B-R1
PART NO. 料號
DWG NO. 圖號: PE200810A

UNIT 單位: mm

XYCO 东莞市轩业电子科技有限公司
TEL: 0769-8297 9981/2/3 http://www.XYCO.com.cn

PRODUCT NAME 產品名稱: 20454 PH0.50mm XXP Wire To Board Pull Bar Connector