

# DRAWING FOR CUSTOMER

KB501-XX X S R 3 A

Pin No.

包装方式:

T:TUBE (管装)

R:REEL (卷装)

P: PE (袋装)

Version

Mold No.

R:Right Angle

V:Vertical

S:SMT




D:DIP

■SPEC.:

- Rated Voltage:100V AC,DC
- Rated Current:1A AC,DC
- Withstand Voltage:250V AC/minute
- Contact Resistance:50mΩ max
- Insulation Resistance:1000MΩ min
- Temperature Range:-40℃~+85℃

■Material:

- Insulator:LCP UL94V-0,Black
- Contact Pin:Copper alloy  
Finish:Gold-plated,over Nickel
- Shell:Stainless Steel  
Finish:Gold-plated,over Nickel

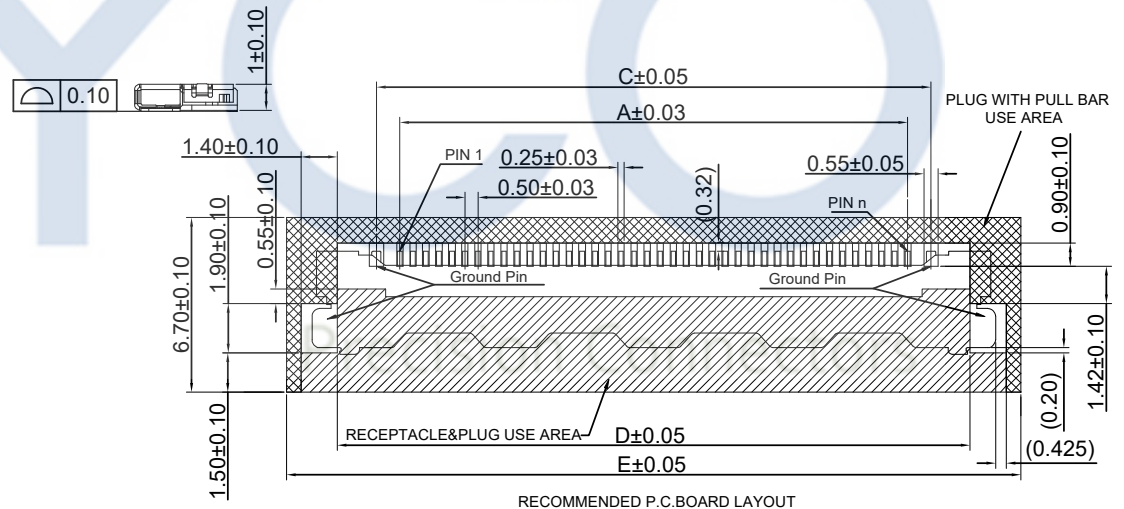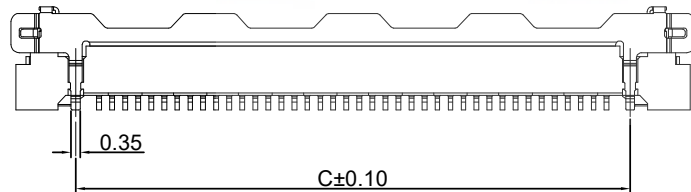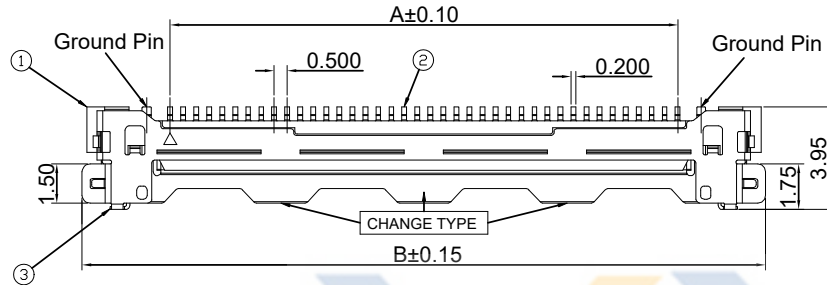

NOT VIA/TRACE/TEST POINT AREA  
RECEPTACLE&PLUG USE AREA

NOT VIA/TRACE/TEST POINT AREA  
PLUG WITH PULL BAR USE AREA

RECOMMENDED P.C.BOARD LAYOUT

Poles	A	B	C	D	E
30	14.50	21.25	16.30	19.30	23.20
40	19.50	26.25	21.30	24.30	28.20
50	24.50	31.25	26.30	29.30	33.20

DATE 日期	VER 版本	CHANGE HISTORY 變更歷史	CHANGED NAME 修改後料號	DRAWING 變更者
2013-03-04	A		KB501-XXXSR3A	Devin

TOLERANCE 公差	DRAWING 設計者	Devin
.X=±0.30	CHECKED 審查	Thomas
.XX=±0.20	APPROVED 核准	William
.XXX=±0.10		

PART NO. 料號		UNIT 單位	mm
DWG NO. 圖號	PE0909A		

**XYCO** 东莞市轩业电子科技有限公司  
TEL: 0769-8297 9981/2/3 <http://www.XYCO.com.cn>

PRODUCT NAME 產品名稱	20454 PH0.5mm Wire To Board SMT Right Angle Wafer
----------------------	--