



DRAWING FOR CUSTOMER

■SPEC.:

- Rated Voltage:200V AC,DC
- Rated Current:0.5A AC,DC
- Withstand Voltage:500V AC/minute
- Contact Resistance:40mΩ max
- Insulation Resistance:100MΩ min
- Temperature Range:-40℃~+80℃

■Material:

- ①Insulator:LCP UL94V-0
Color:Natural
- ②Contact:Copper Alloy
Finish:Contact area Gold-plating over Nickel;
Soldering area Tin(Matte) over Nickel.
- ③Ground:Copper alloy
Finish:Tin(Matte) over Nickel.
- ④Shell:Stainless Steel
Finish:Soldering area Gold flash over nickel.

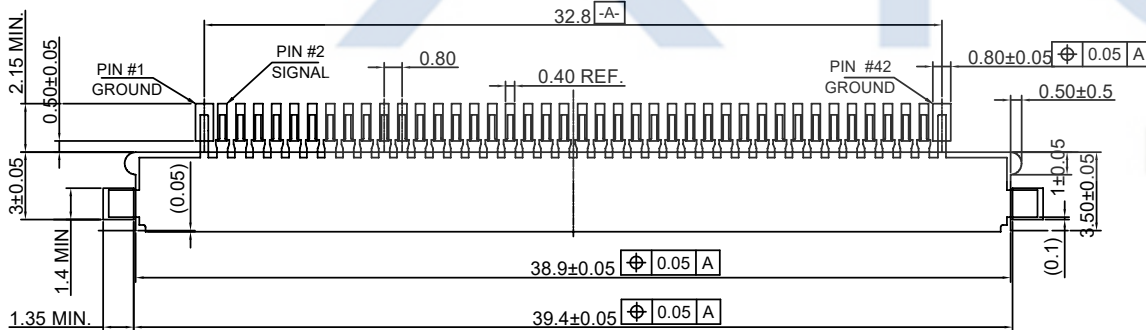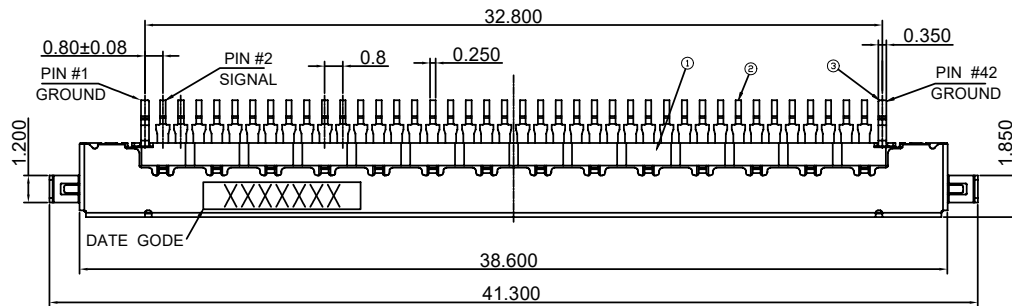

RECOMMENDED P.C.BOARD LAYOUT

KB803-30 R S R 2 A

Pin No.

T:TUBE 管裝
R:REEL 卷裝
P:PE 袋裝

Version

Mold No.

R:Right Angle
V:Vertical

D:DIP
S: SMT

XYCO 东莞市轩业电子科技有限公司
TEL: 0769-8297 9981/2/3 <http://www.XYCO.com.cn>

2018-05-26	A		KB803-40RSR2A	Devin	TOLERANCE 公差	DRAWING 設計者	Devin	KB803-40RSR2A
DATE 日期	VER 版本	CHANGE HISTORY 變更歷史	CHANGED NAME 修改後料號	DRAWING 變更者	.X=±0.30 .XX=±0.20 .XXX=±0.10	CHECKED 審查	Thomas	PART NO. 料號
						APPROVED 核准	William	DWG NO. 圖號
								PE2209008A

UNIT 單位	mm	PRODUCT NAME 產品名稱	FI-NX PH0.80mm Wire To Board SMT Right Angle Wafer
------------	----	----------------------	-------------------------------------------------------