
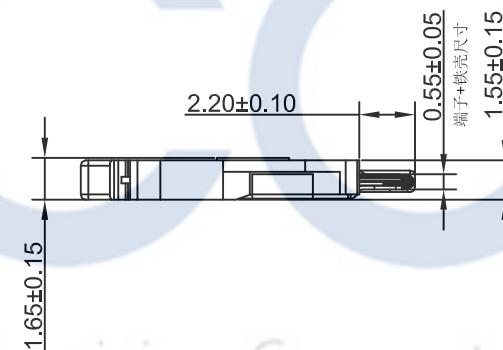
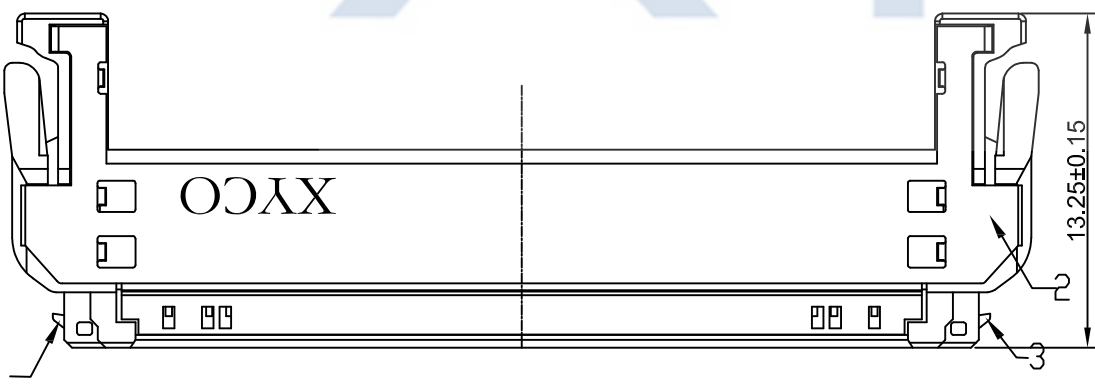
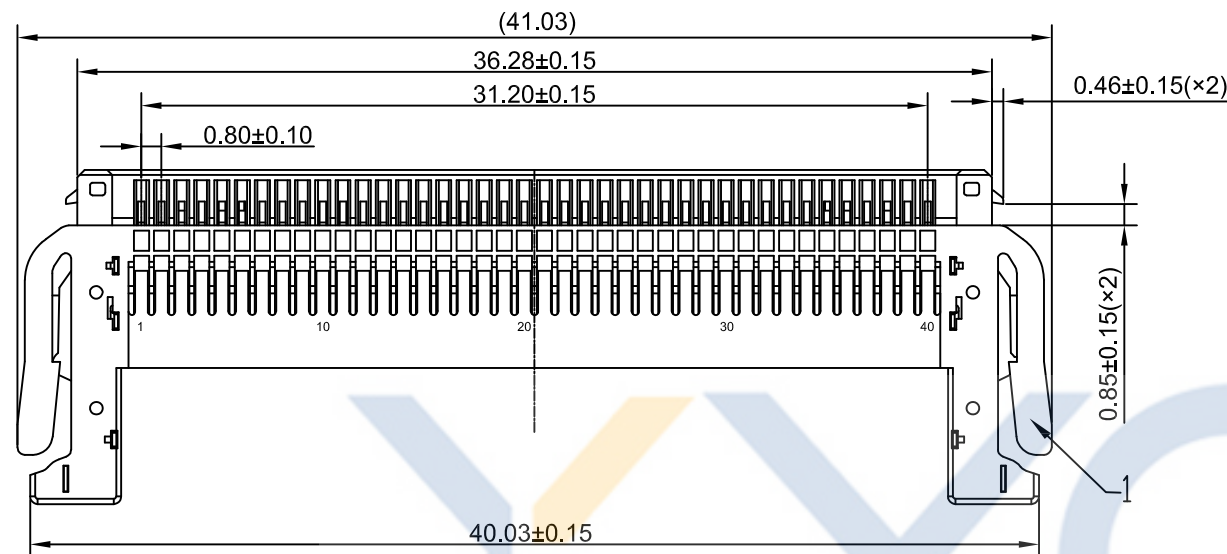


# DRAWING FOR CUSTOMER

## ■SPEC.:

- Rated Voltage:200V AC,DC
- Rated Current:0.5A AC,DC
- Withstand Voltage:500V AC/minute
- Contact Resistance:40mΩ max
- Insulation Resistance:100MΩ min
- Temperature Range:-25℃~+80℃

KB803-40 H L 1 A-X

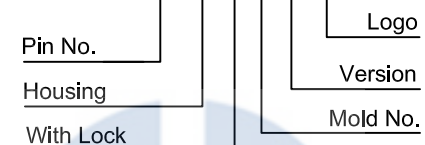

NO.	NAME	QUANTITY	MATERIAL	COLOR	REMARK
4	Left Hook	1	SUS		Stamping
3	Right Hook	1	SUS		Stamping
2	Lower shell	1	SUS		Stamping
1	Housing	1	GLASS FILLED THERMO PLASTIC UL94V-0	Black	Shaping

**XYCO** 东莞市轩业电子科技有限公司  
TEL: 0769-8297 9981/2/3 http://www.XYCO.com.cn

DATE 日期	VER 版本	CHANGE HISTORY 變更歷史	CHANGED NAME 修改後料號	DRAWING 變更者	TOLERANCE 公差 .X=±0.30 .XX=±0.20 .XXX=±0.10	DRAWING 設計者	Devin	KB803-40HL1A-X
2018-01-20	A		KB803-40HL1A-X	Devin		CHECKED 審查	Thomas	PART NO. 料號
						APPROVED 核准	William	DWG NO. 圖號

UNIT 單位	mm	PRODUCT NAME 產品名稱	FI-NX 40P PH0.8mm Wire To Board Housing
mm			