


DRAWING FOR CUSTOMER

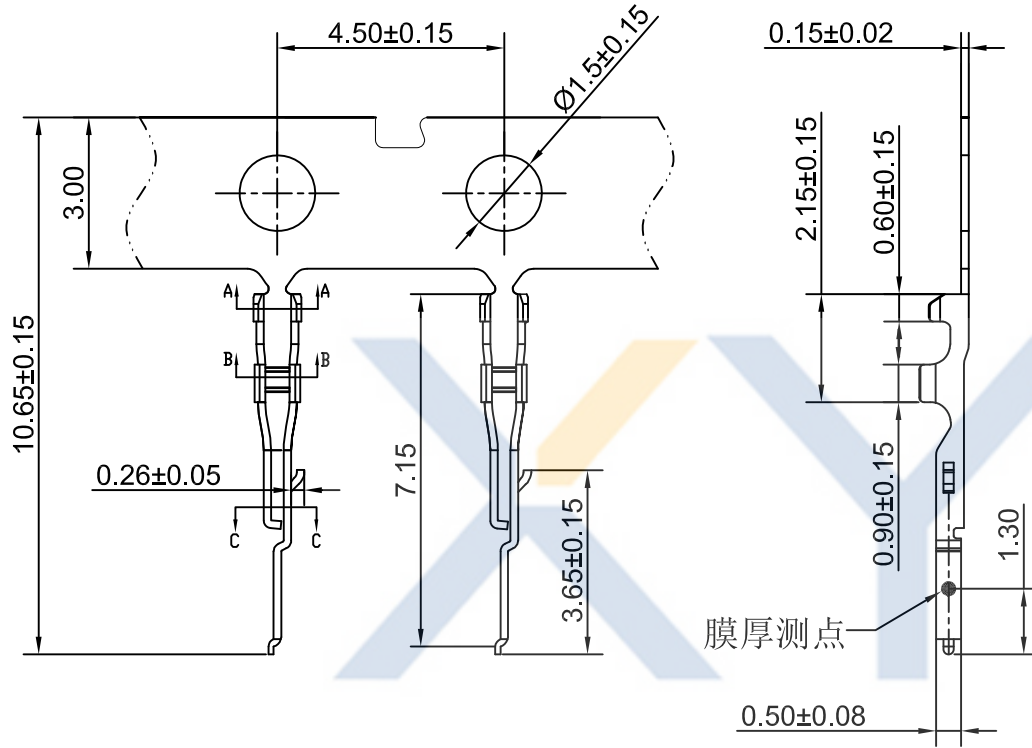

■SPEC.:

- Rated Voltage:200V AC,DC
- Rated Current:0.5A AC,DC
- Withstand Voltage:500V AC/minute
- Contact Resistance:40mΩ max
- Insulation Resistance:100MΩ min
- Temperature Range:-25℃~+80℃

■Terminal:

- Material:Phosphor Bronze
- Finish:Contact Area Gold-plated,over Nickel
- Insulation OD:0.5mm(Max)
- Applicable Wire:AWG#30~36
- QTY.:20KPCS/Reel




KB803-X X T 1 A

- 10: Tin plated
- 11: Gold plated 1u"
- 12: Gold plated 3u"
- 14: Gold plated 4u"


Terminal

Version

Mold No.

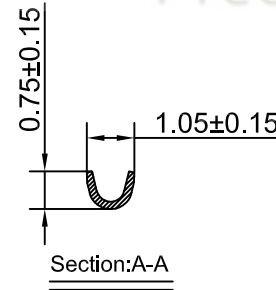

膜厚测点

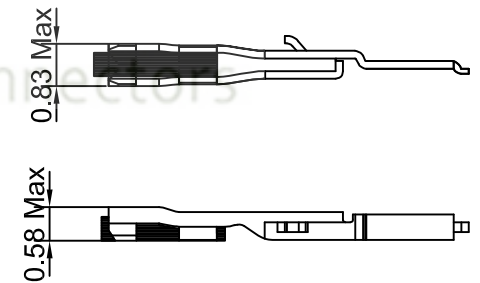

端子铆线后状态

XYCO 东莞市轩业电子科技有限公司
TEL: 0769-8297 9981/2/3 <http://www.XYCO.com.cn>

2018-01-20	A		KB803-XXT1A	Devin
DATE 日期	VER 版本	CHANGE HISTORY 變更歷史	CHANGED NAME 修改後料號	DRAWING 變更者

TOLERANCE 公差	DRAWING 設計者	Devin
.X=±0.30	CHECKED 審查	Thomas
.XX=±0.20	APPROVED 核准	William
.XXX=±0.10		

KB803-XXT1A	
PART NO. 料號	
DWG NO. 圖號	PE1801006A

UNIT 單位	mm
PRODUCT NAME 產品名稱	

FI-NX PH0.8mm Wire To Board Terminal
