
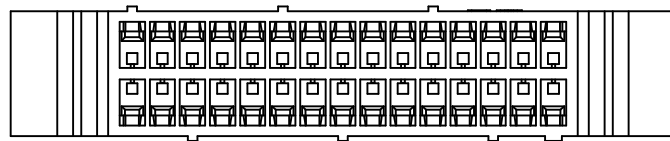

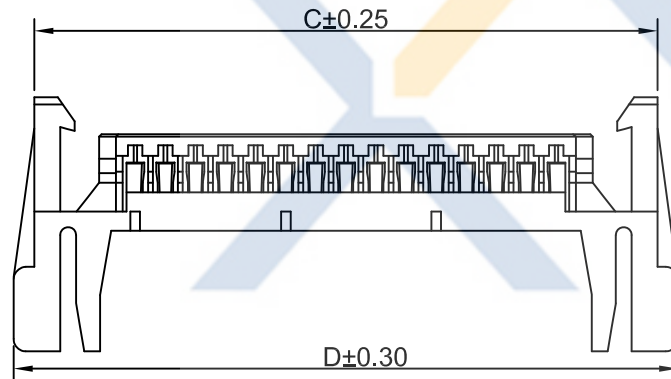


DRAWING FOR CUSTOMER

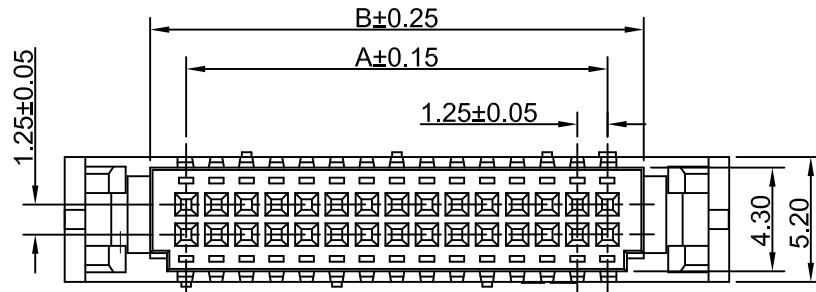

- SPEC.:
- Rated Voltage:150V AC,DC
 - Rated Current:1A AC,DC
 - Withstand Voltage:500V AC/minute
 - Contact Resistance:30mΩ max
 - Insulation Resistance:500MΩ min
 - Temperature Range:-25℃~+85℃
 - Applicable wire:AWG#28~32

- Material:
- Insulator:PA66 UL94V-0
 - Color:Brown

KB911-D XXHL3A

Double row Version
Pin No. Mold No.
Housing With Lock

Poles	Dimensions(mm)			
	A	B	C	D
2X05	5.00	8.00	13.40	15.10
2X06	6.25	9.25	14.65	16.35
2X07	7.50	10.50	15.90	17.30
2X10	11.25	14.25	19.65	21.35
2X15	17.50	20.50	25.90	27.60
2X20	23.75	26.75	32.15	33.85

XYCO 东莞市轩业电子科技有限公司
TEL: 0769-8297 9981/2/3 <http://www.XYCO.com.cn>

					TOLERANCE 公差	DRAWING 設計者	Devin	KB911-DXXHL3A			
2013-06-21	A	CHANGE HISTORY 變更歷史	KB911-DXXHL3A	Devin	.X=±0.30	CHECKED 審查	Thomas	PART NO. 料號			
DATE 日期	VER 版本				.XX=±0.20	APPROVED 核准	William	DWG NO. 圖號	PE1909006A	UNIT 單位	mm
					.XXX=±0.10					PRODUCT NAME 產品名稱	DF13 PH1.25mm Wire To Board Double Row Housing With Lock

