




DRAWING FOR CUSTOMER

■SPEC.:

- Rated Voltage:250V AC,DC
- Rated Current:3A AC,DC
- Withstand Voltage:800V AC/minute
- Contact Resistance:20mΩ max
- Insulation Resistance:1000MΩ min
- Temperature Range:-25℃~+85℃

■Material:

- Insulator:PA66 UL94V-0
- Color:White

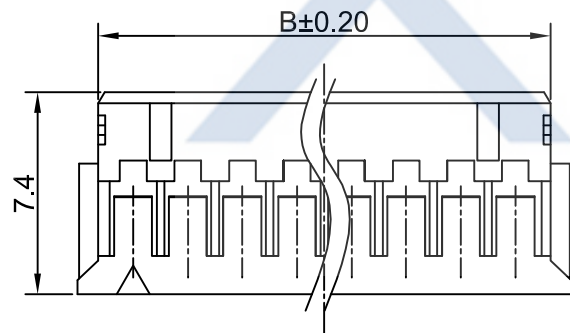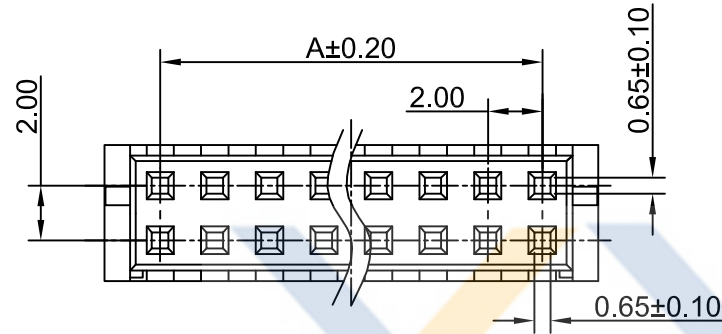

KB932-D XX H 6 A
 Double row Pin No. Housing Version Mold No.

| Poles | Dimensions(mm) | |
|-------|----------------|-------|
| | A | B |
| 2X03 | 4.00 | 6.70 |
| 2X04 | 6.00 | 8.70 |
| 2X05 | 8.00 | 10.70 |
| 2X06 | 10.00 | 12.70 |
| 2X07 | 12.00 | 14.70 |
| 2X08 | 14.00 | 16.70 |
| 2X09 | 16.00 | 18.70 |
| 2X10 | 18.00 | 20.70 |
| 2X11 | 20.00 | 22.70 |
| 2X12 | 22.00 | 24.70 |
| 2X13 | 24.00 | 26.70 |
| 2X14 | 26.00 | 28.70 |
| 2X15 | 28.00 | 30.70 |
| 2X16 | 30.00 | 32.70 |
| 2X17 | 32.00 | 34.70 |
| 2X18 | 34.00 | 36.70 |
| 2X19 | 36.00 | 38.70 |
| 2X20 | 38.00 | 40.70 |

XYCO 东莞市轩业电子科技有限公司
 TEL: 0769-8297 9981/2/3 http://www.XYCO.com.cn

| | | | | | | | | | |
|------------|-----------|------------------------|-----------------------|----------------|-------------------------------------|----------------|---------|---------------|----------------------|
| 2016-11-18 | A | | KB932-DXXH6A | Devin | TOLERANCE 公差 | DRAWING 設計者 | Devin | KB932-DXXH6A | |
| DATE 日期 | VER 版本 | CHANGE HISTORY 變更歷史 | CHANGED NAME 修改後料號 | DRAWING 變更者 | .X=±0.30 .XX=±0.20 .XXX=±0.10 | CHECKED 審查 | Thomas | PART NO. 料號 | UNIT 單位 |
| | | | | | | APPROVED 核准 | William | DWG NO. 圖號 | mm |
| 1 | 2 | 3 | 4 | 5 | 6 | 7 | 8 | 9 | PRODUCT NAME 產品名稱 |

| | |
|------------|------------------------------------|
| PE1807035A | PHD 2.0mm Wire To Board Housing |
|------------|------------------------------------|