

# DRAWING FOR CUSTOMER

KB933-XX X D V 5 A

Pin No.

包装方式:

T:TUBE (管装)

R:REEL (卷装)

P: PE (袋装)

Version

Mold No.

R:Right Angle

V:Vertical

S:SMT





D:DIP

■SPEC.:

- Rated Voltage:250V AC,DC
- Rated Current:2A AC,DC
- Withstand Voltage:1000V AC/minute
- Contact Resistance:20mΩ max
- Insulation Resistance:1000MΩ min
- Temperature Range:-25°C~+85°C

■Material:

- Insulator(A):PA66 UL94V-0
- Contact Pin(B): Brass  
Finish: Tin-Plated, over Nickel

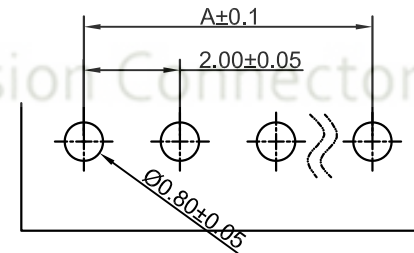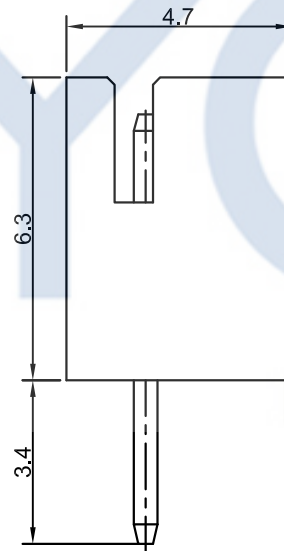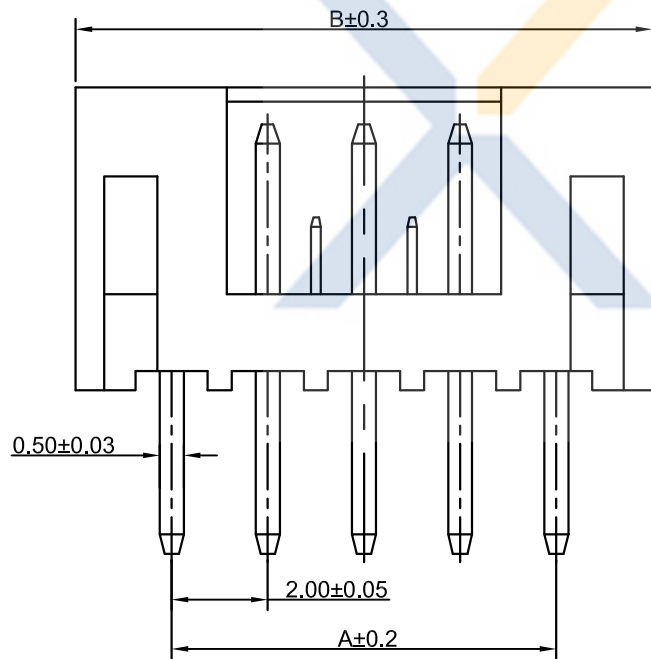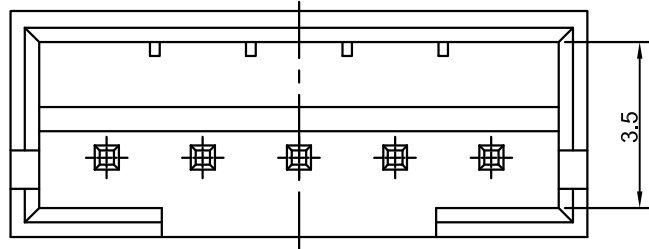

SUGGESTED PCB LAYOUT  
(COMPONENT SIDE)

Poles	Dimensions(mm)	
	A	B
02	2.0	6.1
03	4.0	8.1
04	6.0	10.1
05	8.0	12.1
06	10.0	14.1
07	12.0	16.1
08	14.0	18.1
09	16.0	20.1
10	18.0	22.1
11	20.0	24.1
12	22.0	26.1
13	24.0	28.1
14	26.0	30.1
15	28.0	32.1
16	30.0	34.1

**XYCO** 东莞市轩业电子科技有限公司  
TEL: 0769-8297 9981/2/3 <http://www.XYCO.com.cn>

2016-11-18		A	CHANGE HISTORY 變更歷史	KB933-XXXDV5A	Devin	TOLERANCE 公差	DRAWING 設計者	Devin	KB933-XXXDV5A		UNIT 單位		PRODUCT NAME 產品名稱	PHR PH2.0mm Wire To Board Dip vertical Wafer
DATE 日期	VER 版本	CHANGED NAME 修改後料號				DRAWING 變更者	.X=±0.30 .XX=±0.20 .XXX=±0.10	CHECKED 審查	Thomas	PART NO. 料號	mm			
								APPROVED 核准	William	DWG NO. 圖號	PE1705003A			