

DRAWING FOR CUSTOMER

- SPEC.:
- Rated Voltage: 250V AC,DCm
 - Rated Current: 2A AC,DC
 - Withstand Voltage: 1000V AC/minute
 - Contact Resistance:20mΩ max
 - Insulation Resistance: 1,000MΩ min
 - Temperature Range: -25°C~+85°C






- Material :
- Insulator(A): C1-LCP UL94V-0
Color:BGE-Beige
 - Contact Pin(B):Brass
Finish: S-Tin-Plated,over Nicke
G-Gold flash,over Nicke

XY20002-D XX X D R X 3 A -C1-BGE

Double row
Pin No. Color
Material
Version
Mold No.
G:Gold flash
S:Tin plated
R:Right Angle
V:Vertical

包装方式:
T:TUBE (管装)
R:REEL (卷装)
P: PE (袋装)

S:SMT
D:DIP

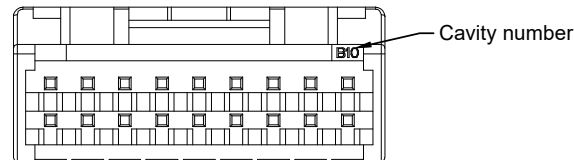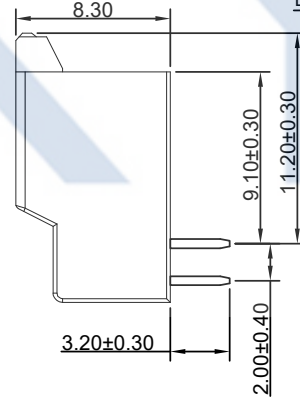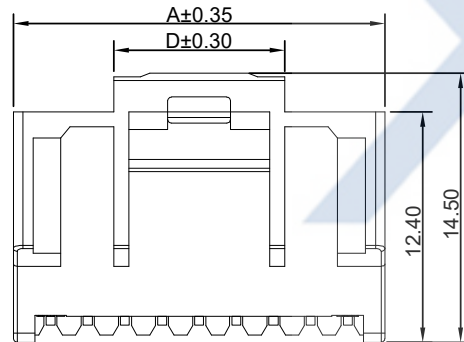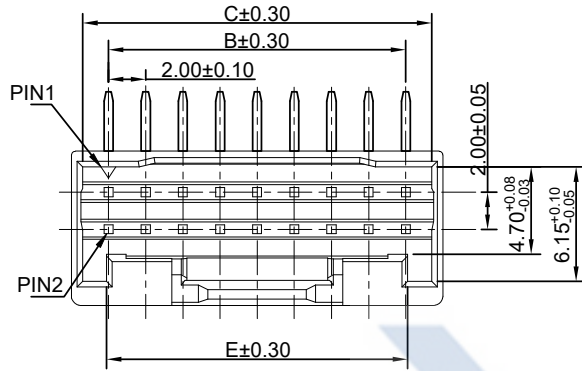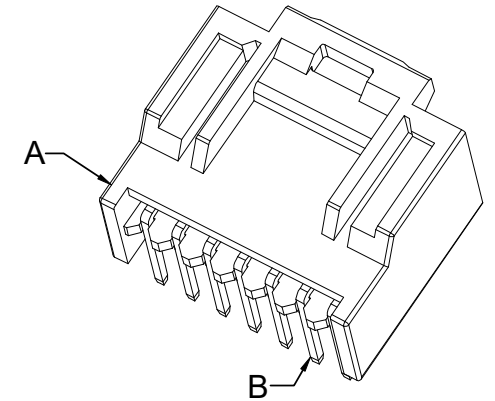

Poles	Dimensions(mm)				
	A	B	C	D	E
2X02	6.00	2.00	4.80	3.20	3.20
2X03	8.00	4.00	6.80	3.80	4.20
2X04	10.00	6.00	8.80	5.20	6.20
2X05	12.00	8.00	10.80	7.30	8.20
2X06	14.00	10.00	12.80	9.20	10.20
2X07	16.00	12.00	14.80		12.20
2X08	18.00	14.00	16.80		14.20
2X09	20.00	16.00	18.80		16.20
2X10	22.00	18.00	20.80		18.20
2X11	24.00	20.00	22.80		20.20
2X12	26.00	22.00	24.80		22.20
2X13	28.00	24.00	26.80		24.20
2X14	30.00	26.00	28.80		26.20
2X15	32.00	28.00	30.80		28.20
2X16	34.00	30.00	32.80	30.20	
2X17	36.00	32.00	34.80	32.20	
2X18	38.00	34.00	36.80	34.20	
2X19	40.00	36.00	38.80	36.20	
2X20	42.00	38.00	40.80	38.20	

XYCO 东莞市轩业电子科技有限公司
TEL: 0769-8297 9981/2/3 http://www.XYCO.com.cn

2020-06-15	A		XY20002-DXXXDRX3A-C1-BGE	Devin	TOLERANCE 公差	DRAWING 設計者	Devin	XY20002-DXXXDRX3A-C1-BGE
DATE 日期	VER 版本	CHANGE HISTORY 變更歷史	CHANGED NAME 修改後料號	DRAWING 變更者	.X=±0.30 .XX=±0.20 .XXX=±0.10	CHECKED 審查	Thomas	PART NO. 料號
						APPROVED 核准	William	DWG NO. 圖號
								PE210920A

UNIT 單位	mm	PRODUCT NAME 產品名稱	501876 PH2.0mm Wire To Board Double Row DIP Right Angle Wafer
------------	----	----------------------	--