

DRAWING FOR CUSTOMER


- SPEC.:
- Rated Voltage:50V AC,DC
 - Rated Current:1A AC,DC
 - Withstand Voltage:250V AC/minute
 - Contact Resistance:20mΩ max
 - Insulation Resistance:100MΩ min
 - Temperature Range:-25℃~+85℃

- Material:
- Insulator:PA66 UL94V-0
 - Color:White

KB9907-D X X H L 3 A

Double row
Pin No.
Housing

Version
Mold No.
With Lock

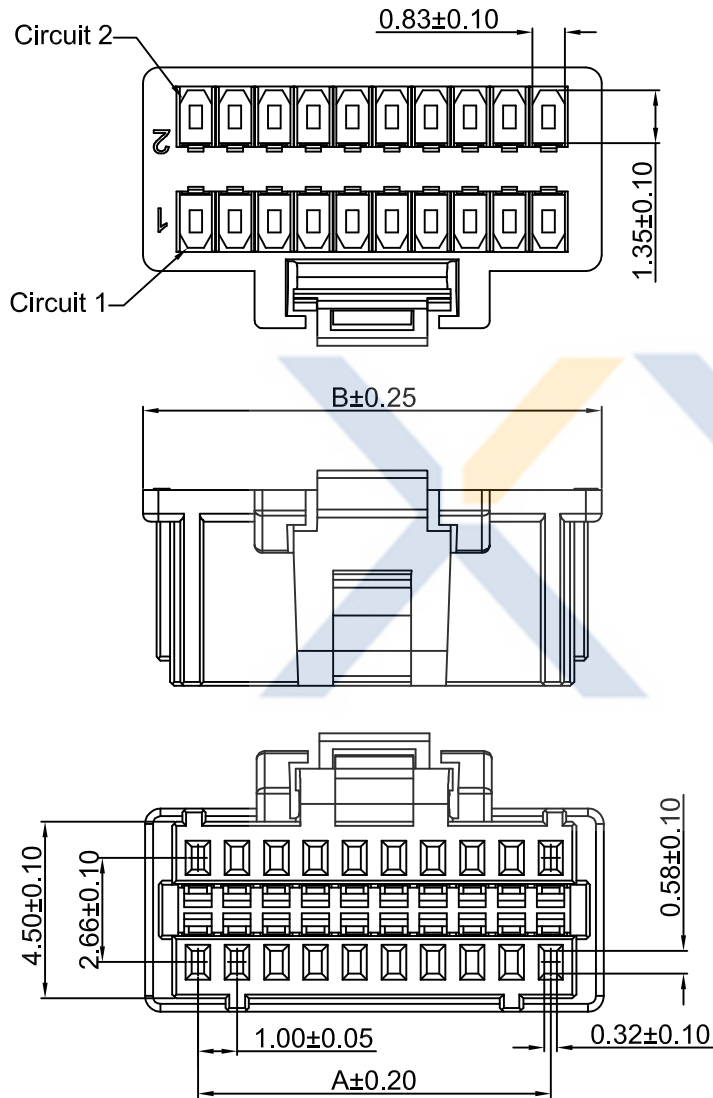

Poles	Dimensions (mm)	
	A	B
2X10	9.00	11.70
2X15	14.00	16.70
2X20	19.00	21.70
2X25	24.00	26.70

XYCO 东莞市轩业电子科技有限公司
TEL: 0769-8297 9981/2/3 <http://www.XYCO.com.cn>

2017-09-15		A	CHANGE HISTORY 變更歷史	KB9907-DXXHL3A	Devin	TOLERANCE 公差	DRAWING 設計者	Devin	KB9907-DXXHL3A		UNIT 單位	mm	PRODUCT NAME 產品名稱	501189 PH 1.00mm Wire To Board Double row Housing With Lock
DATE 日期	VER 版本	CHANGED NAME 修改後料號				DRAWING 變更者	.X=±0.30 .XX=±0.20 .XXX=±0.10	CHECKED 審查	Thomas	PART NO. 料號				
								APPROVED 核准	William	DWG NO. 圖號	PE1712002A			