


DRAWING FOR CUSTOMER

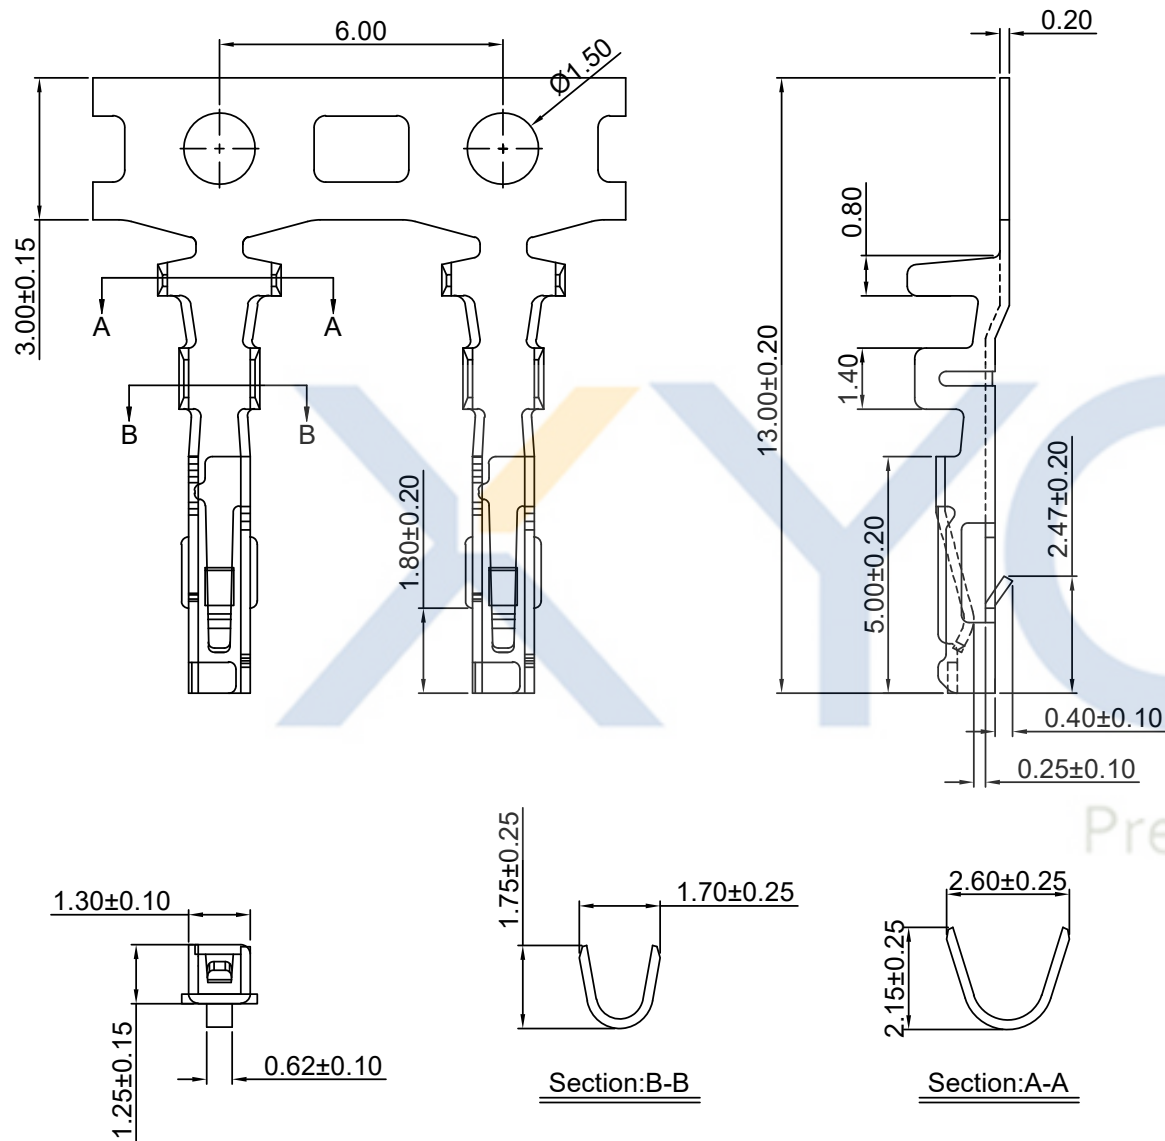

■SPEC.:

- Rated Voltage: 250V AC,DCm
- Rated Current: 2A AC,DC
- Withstand Voltage: 800V AC/minute
- Contact Resistance: 20mΩ max
- Insulation Resistance: 1,000MΩ min
- Temperature Range: -25°C~+85°C

■Terminal:

- Material: Phosphor Bronze
- Finish: Tin plated, over Nickel
- Applicable wire: AWG#22~28
- Insulation O.D: 1.40mm Max
- QTY.: 10KPCS/Reel

XY20002-X X T 2 A

- 1: All plating
- 2: Half plating

Plating

- 0: Tin-plat
- 1: Gold Flash
- 2: Gold Plat 3u"
- 3: Gold Plat 5u"

Version

Mold No.

Terminal

Precision Connectors

2018-05-12	A		XY20002-XXT2A	Devin	TOLERANCE 公差	DRAWING 設計者	Devin	XY20002-XXT2A
DATE 日期	VER 版本	CHANGE HISTORY 變更歷史	CHANGED NAME 修改後料號	DRAWING 變更者	.X=±0.30 .XX=±0.20 .XXX=±0.10	CHECKED 審查	Thomas	PART NO. 料號
						APPROVED 核准	William	DWG NO. 圖號
								PE180512A

XYCO 东莞市轩业电子科技有限公司
TEL: 0769-8297 9981/2/3 <http://www.XYCO.com.cn>

UNIT 單位	mm	PRODUCT NAME 產品名稱	501647 PH2.0mm Wire To Board Terminal
------------	----	----------------------	--