


DRAWING FOR CUSTOMER

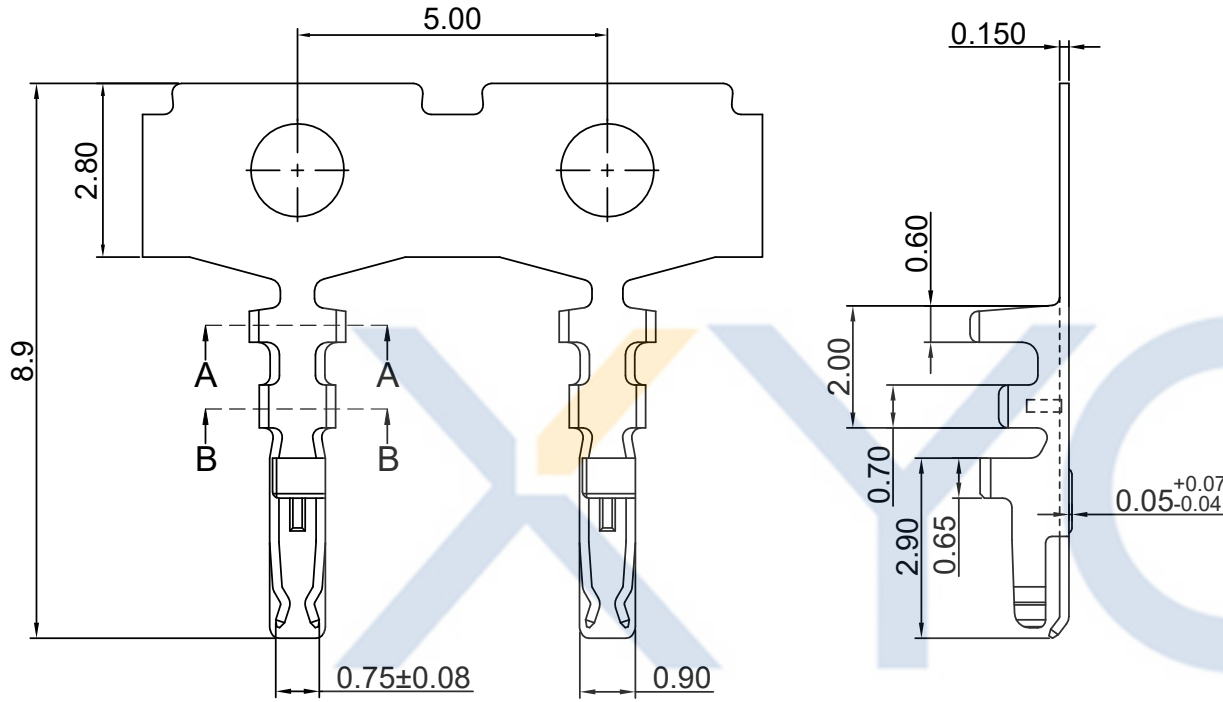

■SPEC.:




- Voltage Rating:50V AC/DC
- Current Rating:1.5A AC/DC
- Dielectric Strength :500V AC/minute
- Contact Resistance:20mΩ max
- Insulation Resistance:100MΩ min
- Temperature Range:-25°C ~+85°C

■Terminal:


- Material:Phosphor Bronze
- Finish: Tin/Gold-Plated;Over Nickel-Plated
- Applicable Wires:AWG#26~30
Insulator OD:Ø1.00mm MAX
- Q'ty:20KPCS/Reel

XY12501-X X T 2 A

1:All plated	Version
2:Half plated	
Plating	Terminal
0: Tin-plat	
1: Gold Flash	
2: Gold Plat 3u"	Mold No.
3: Gold Plat 5u"	



Section:B-B



Section:A-A

XYCO 东莞市轩业电子科技有限公司
TEL: 0769-8297 9981/2/3 <http://www.XYCO.com.cn>

2021-05-16	A	CHANGE HISTORY 變更歷史	XY12501-XXT2A	Devin	TOLERANCE 公差	DRAWING 設計者	Devin	XY12501-XXT2A			
DATE 日期	VER 版本				CHANGED NAME 修改後料號	DRAWING 變更者	.X=±0.10 .XX=±0.05 .XXX=±0.03	CHECKED 審查	Thomas	PART NO. 料號	UNIT 單位
								APPROVED 核准	William	DWG NO. 圖號	PE210502A

PRODUCT NAME 產品名稱	505431 PH1.25mm Wire To Board Terminal
----------------------	--