
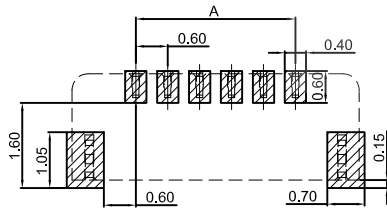




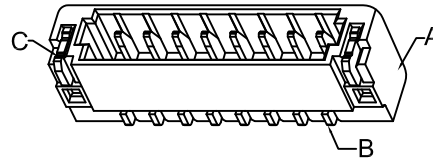



DRAWING FOR CUSTOMER

- SPEC.:
- Rated Voltage:30V AC,DC
 - Rated Current:0.2A AC,DC(AWG#32)
 - Withstand Voltage:200V AC/minute
 - Contact Resistance:30mΩ max
 - Insulation Resistance:100MΩ min
 - Temperature Range:-25℃~+85℃

- Material:
- Insulator(A):LCP UL94V-0
 - Contact Pin(B): Phosphor Bronze
Finish: Tin/Gold-Plated,over Nickel
 - Solder Tab(C):Brass
Finish: Tin/Gold-Plated,over Nickel

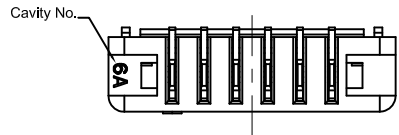

Recommended P.C.B Layout
General Tolerance±0.05

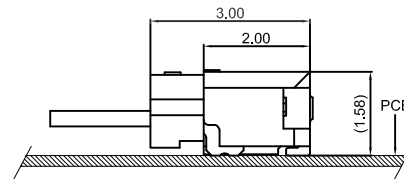

Mated Condition

KB601-XXXSRX2A

Pin No.

P:PE 袋装
R:REEL 卷装
T:TUBE 管装

S:SMT
D:DIP

Version
Mold No.

G:GOLD FLASH
S:MATTE TIN

R:Right angle
V:Verical

Poles	Dimensions(mm)		Poles	Dimensions(mm)	
	A	B		A	B
02	0.60	3.00	12	6.60	9.00
03	1.20	3.60	13	7.20	9.60
04	1.80	4.20	14	7.80	10.20
05	2.40	4.80	15	8.40	10.80
06	3.00	5.40	16	9.00	11.40
07	3.60	6.00	17	9.60	12.00
08	4.20	6.60	18	10.20	12.60
09	4.80	7.20	19	10.80	13.20
10	5.40	7.80	20	11.40	13.80
11	6.00	8.40	22	12.60	14.40

XYCO 东莞市轩业电子科技有限公司
TEL: 0769-8297 9981/2/3 http://www.XYCO.com.cn

2016-11-30	A		KB601-XXXSRX2A	Devin	TOLERANCE 公差	DRAWING 設計者	Devin	KB601-XXXSRX2A
DATE 日期	VER 版本	CHANGE HISTORY 變更歷史	CHANGED NAME 修改後料號	DRAWING 變更者	.X=±0.30 .XX=±0.20 .XXX=±0.10	CHECKED 審查	Thomas	PART NO. 料號
						APPROVED 核准	William	DWG NO. 圖號

UNIT 單位	mm	PRODUCT NAME 產品名稱	XSRS PH0.6mm Wire To Board SMT Right Angle Wafer
------------	----	----------------------	---