

DRAWING FOR CUSTOMER

KB501-XX X S R 2 A

Pin No. Version
 Mold No.





包装方式:
 T:TUBE (管装)
 R:REEL (卷装)
 P: PE (袋装)

R:Right Angle
 V:Vertical


S:SMT
 D:DIP

- SPEC.:
- Rated Voltage:100V AC,DC
 - Rated Current:1A AC,DC
 - Withstand Voltage:250V AC/minute
 - Contact Resistance:50mΩ max
 - Insulation Resistance:1000MΩ min
 - Temperature Range:-40℃~+85℃


- Material:
- Insulator:LCP UL94V-0,Black
 - Contact Pin:Copper alloy
Finish:Gold-plated,over Nickel
 - Shell:Copper alloy
Finish:Gold-plated,over Nickel

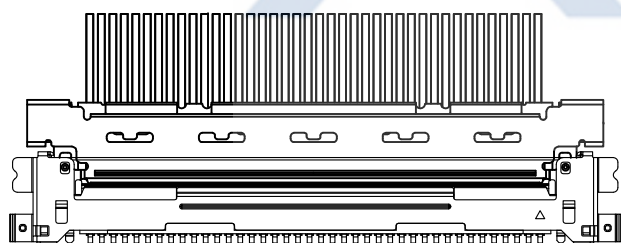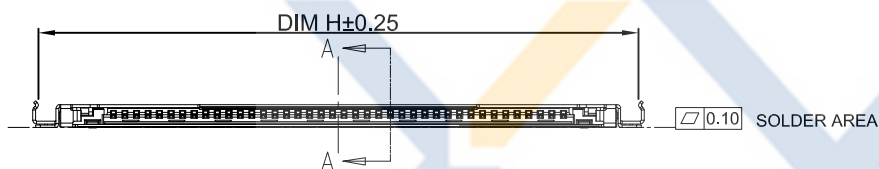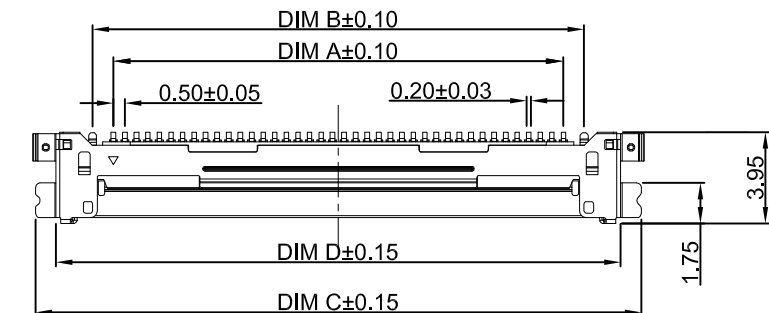


ASSEMBLY

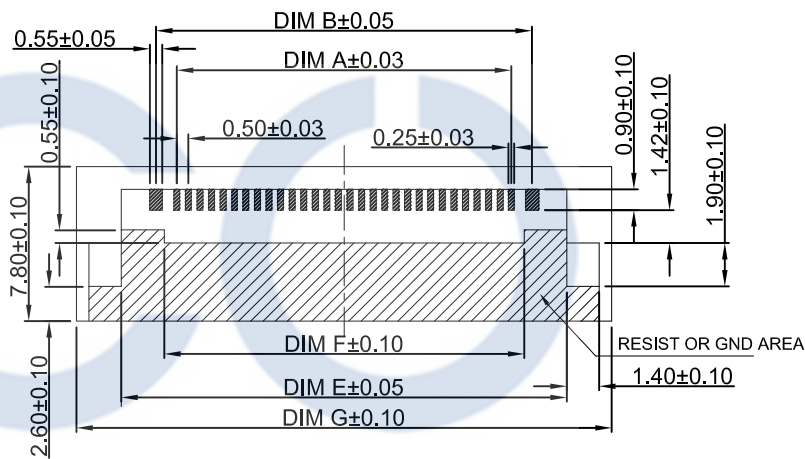

Applicable PCB dimensions



Mated Condition



Section:A-A

Scale 2:1

Poles	A	B	C	D	E	F	G	H
30	14.50	16.30	21.25	19.47	19.30	15.60	23.20	21.00
40	19.50	21.30	26.25	24.47	24.30	20.60	28.20	26.00

DATE 日期	VER 版本	CHANGE HISTORY 變更歷史	CHANGED NAME 修改後料號	DRAWING 變更者	TOLERANCE 公差	DRAWING 設計者	Devin	KB501-XXXSR2A
2013-03-04	A		KB501-XXXSR2A	Devin	.X=±0.30 .XX=±0.20 .XXX=±0.10	CHECKED 審查	Thomas	PART NO. 料號
						APPROVED 核准	William	DWG NO. 圖號

XYCO 东莞市轩业电子科技有限公司
 TEL: 0769-8297 9981/2/3 http://www.XYCO.com.cn

UNIT 單位	mm	PRODUCT NAME 產品名稱	20454 PH0.5mm Wire To Board SMT Right Angle Wafer