


DRAWING FOR CUSTOMER

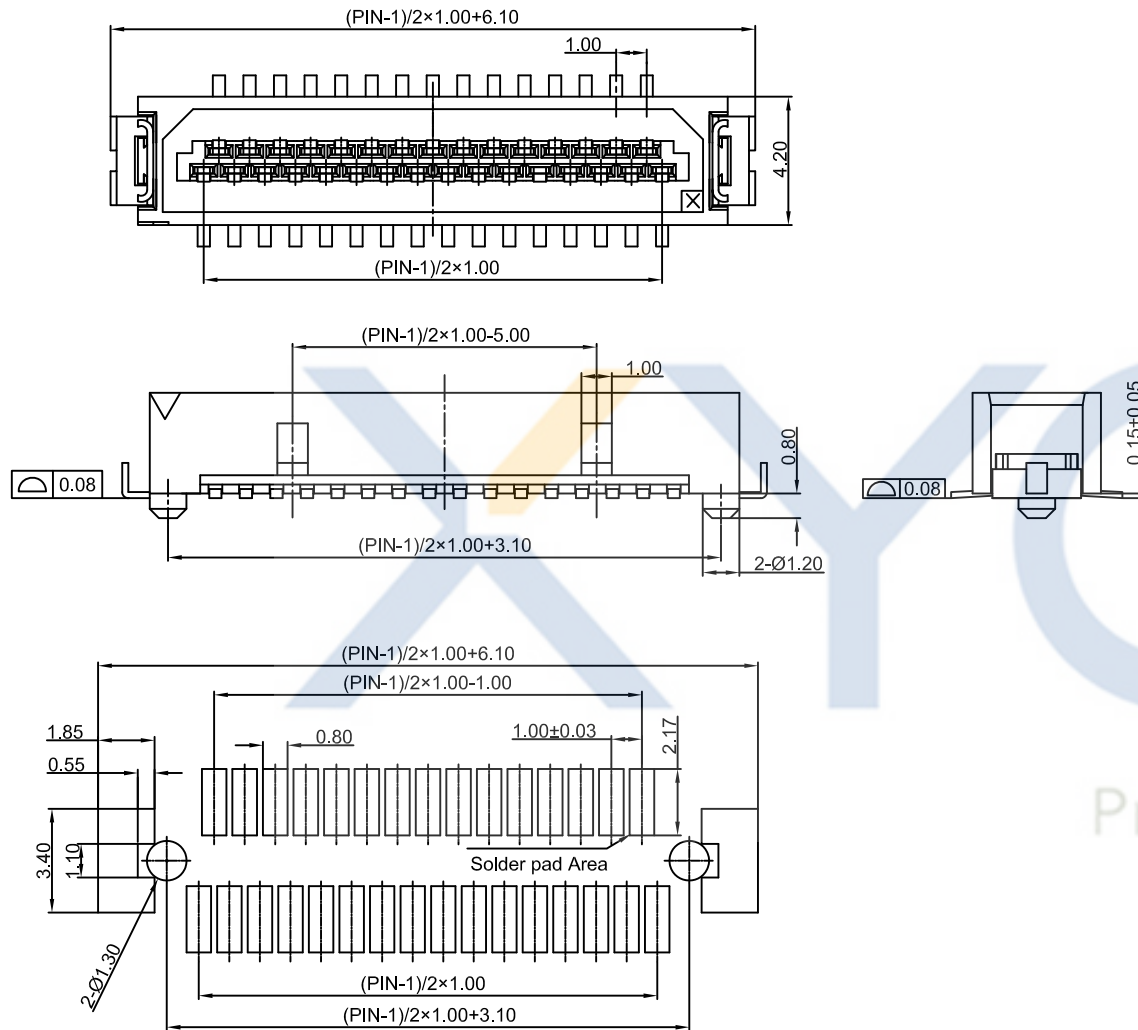

■SPEC.:

- Rated Voltage:150V AC,DC
- Rated Current:0.5A AC,DC
- Withstand Voltage:250V AC/minute
- Contact Resistance:50mΩ max
- Insulation Resistance:500MΩ min
- Temperature Range:-25℃~+105℃

■Material

- Insulator(A):PA46 UL94V-0
- Contact(B):Phosphor Bronze
Finish:Gold/Tin-Plated,over Nickel
- Solder Tab(C):Brass
Finish:Tin-Plated,over Nickel

KB908-XX X S V 2 A

Pin No.
21=21 Pin
31=31 Pin
41=41 Pin
51=51 Pin

Version

Mold No.

R:Right Angle
V:Vertical

包装方式:

T:TUBE (管装)
R:REEL (卷装)
P: PE (袋装)

S:SMT
D:DIP

Recommended P.C.B Layout(Top Side)

P.C.B Thickness=1.20mm (Tolerance=±0.05)

XYCO 东莞市轩业电子科技有限公司
TEL: 0769-8297 9981/2/3 <http://www.XYCO.com.cn>

				TOLERANCE 公差		DRAWING 設計者		Devin		KB908-XXXSV2A					
2010-08-18		A		.X=±0.30 .XX=±0.20 .XXX=±0.10		CHECKED 審查		Thomas		PART NO. 料號		UNIT 單位		mm	
DATE 日期	VER 版本	CHANGE HISTORY 變更歷史		CHANGED NAME 修改後料號		DRAWING 變更者		APPROVED 核准		William		DWG NO. 圖號		PE1804007A	
												PRODUCT NAME 產品名稱		DF9 PH1.00mm Board Wire Board SMT Vertical Wafer-Male	