
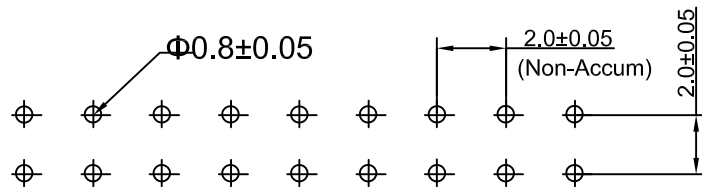
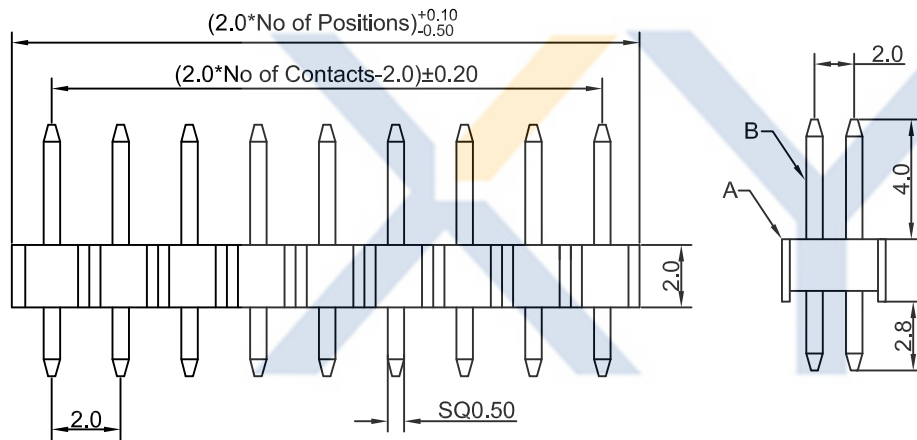


DRAWING FOR CUSTOMER



SUGGESTED PCB LAYOUT
(COMPONENT SIDE)

■SPEC.:

- Rated Voltage: 250V AC,DC
- Rated Current: 2A AC,DC
- Withstand Voltage: 500V AC/minute
- Contact Resistance: 20mΩ max
- Insulation Resistance: 1000MΩ min
- Temperature Range: -25°C~+85°C

■Material :

- Insulator(A):PBT UL94V-0
- Contact Pin(B):Brass
- Finish: Gold-Plated,over Nickel

KB931-D XX X D V 3 A

Double row

Pin No.

包装方式:

T:TUBE (管装)

R:REEL (卷装)

P: PE (袋装)

Version

Mold No.

R:Riht Angle

V:Vertical

S:SMT

D:DIP

Precision Connectors

XYCO 东莞市轩业电子科技有限公司
TEL: 0769-8297 9981/2/3 <http://www.XYCO.com.cn>

2016-05-16	A		KB930-DXXXDV3A	Devin
DATE 日期	VER 版本	CHANGE HISTORY 變更歷史	CHANGED NAME 修改後料號	DRAWING 變更者

TOLERANCE 公差	DRAWING 設計者	Devin
.X=±0.30	CHECKED 審查	Thomas
.XX=±0.20	APPROVED 核准	William
.XXX=±0.10		

KB931-DXXXDV3A	
PART NO. 料號	
DWG NO. 圖號	PE1707002A

UNIT 單位	mm
------------	----

PRODUCT NAME 產品名稱	DP PH2.0mm Wire To Board Double Row DIP Vertical Wafer
----------------------	---

--	--