







# DRAWING FOR CUSTOMER

- SPEC.:
  - Rated Voltage:50V AC,DC
  - Rated Current:1A AC,DC
  - Withstand Voltage:250V AC/minute
  - Contact Resistance:20mΩ max
  - Insulation Resistance:100MΩ min
  - Temperature Range:-25°C~+85°C

- Material:
  - Insulator : PA66 UL94V-0
  - Color:White

KB905-XXH2A

Pin No.		Version
Housing		Mold No.

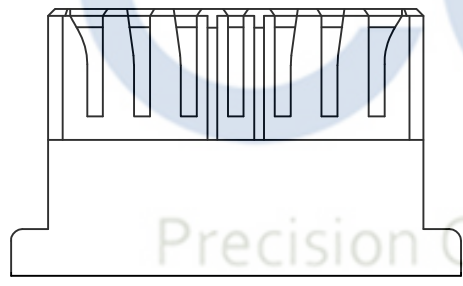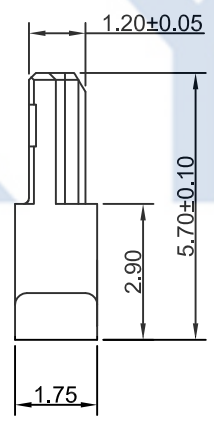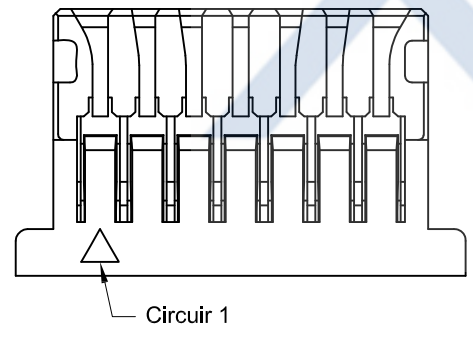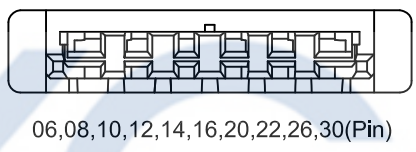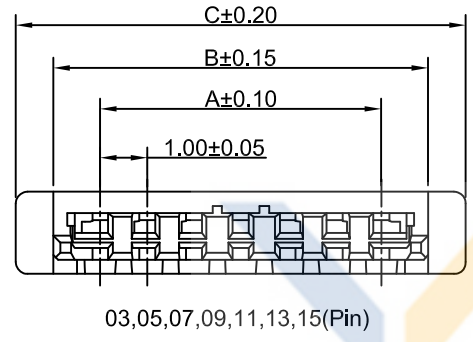

Poles	Dimension mm		
	A	B	C
02	---	3.00	4.60
03	2.00	4.00	5.60
04	3.00	5.00	6.60
05	4.00	6.00	7.60
06	5.00	7.00	8.60
07	6.00	8.00	9.60
08	7.00	9.00	10.60
09	8.00	10.00	11.60
10	9.00	11.00	12.60
11	10.00	12.00	13.60
12	11.00	13.00	14.60
13	12.00	14.00	15.60
14	13.00	15.00	16.60
15	14.00	16.00	17.60
16	15.00	17.00	18.60
20	19.00	21.00	22.60
22	21.00	23.00	24.60
26	25.00	27.00	28.60
30	29.00	31.00	32.60

**XYCO 东莞市轩业电子科技有限公司**  
 TEL: 0769-8297 9981/2/3 http://www.XYCO.com.cn

2013-07-20	A	CHANGE HISTORY 變更歷史	KB905-XXH2A	CHANGED NAME 修改後料號	Devlin	TOLERANCE 公差 .X=±0.30 .XX=±0.20 .XXX=±0.10	DRAWING 設計者 CHECKED 審查 APPROVED 核准	Devlin Thomas William	KB905-XXH2A
DATE 日期	VER 版本				DRAWING 變更者				PART NO. 料號
1	2				3				DWG NO. 圖號 PE2002A

UNIT 單位	mm	PRODUCT NAME 產品名稱	SHLP PH1.00mm Wire To Board Housing
4	5	7	8