DRAWING FOR CUSTOMER

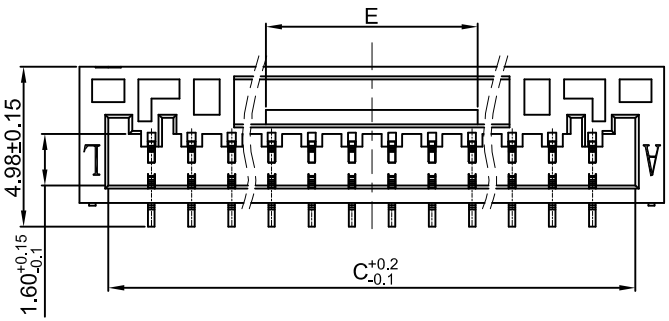



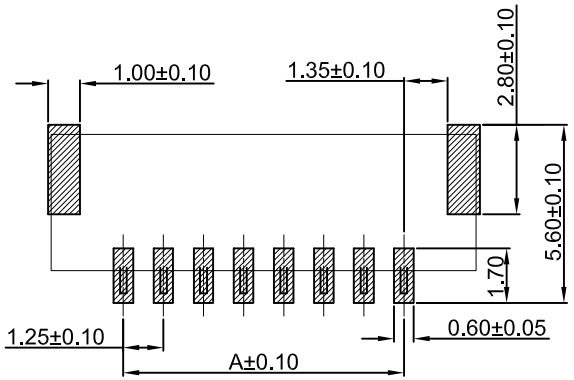

SUGGESTED PCB LAYOUT
(COMPONENT SIDE)

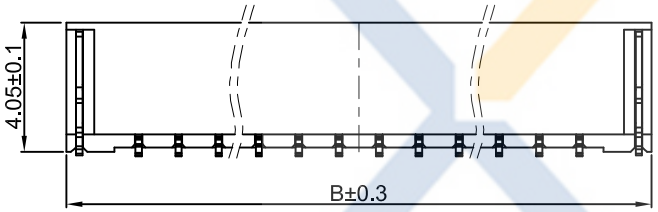

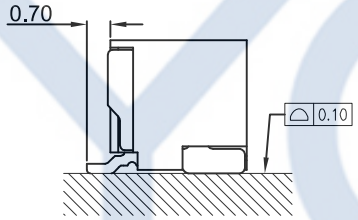

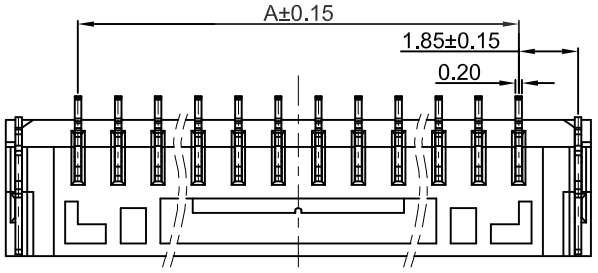

■SPEC.:
- ●Rated Voltage:50V AC,DC
- ●Rated Current:1A AC,DC
- ●Withstand Voltage:500V AC/minute
- ●Contact Resistance:20mΩ max
- ●Insulation Resistance:100MΩ min
- ●Temperature Range:-40℃~+110℃

■Material:
- ●Insulator(A):LCP UL94V-0
- ●Contact PIN(B): Phosphor Bronze Finish:Matted Tin-Plated;over Nickel
- ●Solder tab(C):Phosphor Bronze Finish:Matted Tin-Plated;over Nickel
- ●CAP(D):LCP UL94V-0

KB918-XX X S V 6 A

- Pin No.
- T:TUBE 管裝 / R:REEL 卷裝 / P:PE 袋裝
- D:DIP / S: SMT
- R:Right Angle / V:Vertical
- Mold No.
- Version

Poles	Dimensions(mm)			
	A	B	C	E
02	1.25	5.75	3.75	0.75
03	2.50	7.00	5.00	1.60
04	3.75	8.25	6.25	2.65
05	5.00	9.50	7.50	2.50
06	6.25	10.75	8.75	4.65
07	7.50	12.00	10.00	4.65
08	8.75	13.25	11.25	4.65
09	10.00	14.50	12.50	4.65
10	11.25	15.75	13.75	6.60
11	12.50	17.00	15.00	6.60
12	13.75	18.25	16.25	6.60
13	15.00	19.50	17.50	6.60
14	16.25	20.75	18.75	6.60
15	17.50	22.00	20.00	6.60

DATE 日期	VER 版本	CHANGE HISTORY 變更歷史	CHANGED NAME 修改後料號	DRAWING 變更者
2016-06-12	A		KB918-XXXSV6A	Devin

TOLERANCE 公 差: .X=±0.30, .XX=±0.20, .XXX=±0.10

DRAWING 設計者	Devin
CHECKED 審查	Thomas
APPROVED 核准	William

KB918-XXXSV6A

PART NO. 料號

DWG NO. 圖號: PE1905035A

UNIT 單位: mm

PRODUCT NAME 產品名稱: GHR PH1.25mm Wire To Board SMT Vertical Wafer

XYCO 东莞市轩业电子科技有限公司
TEL: 0769-8297 9981/2/3 http://www.XYCO.com.cn

XYCO Precision Connectors