DRAWING FOR CUSTOMER

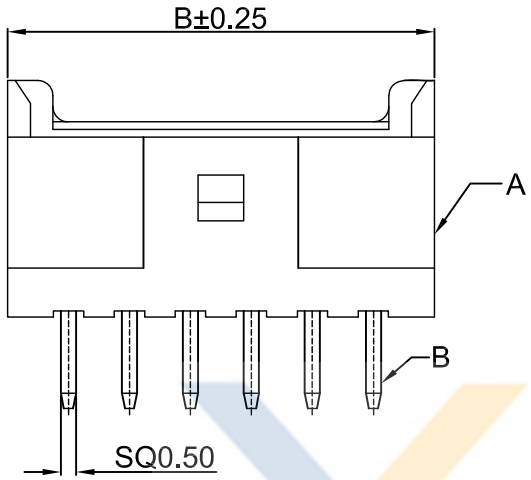

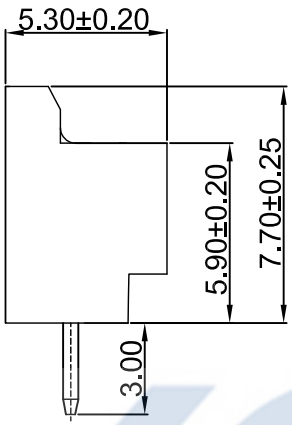

■SPEC.:
- ●Rated Voltage:100V AC,DC
- ●Rated Current:3A AC,DC
- ●Withstand Voltage:800V AC/minute
- ●Contact Resistance:20mΩ max
- ●Insulation Resistance:1000MΩ min
- ●Temperature Range:-25℃~+85℃

■Material:
- ●Insulator(A):PA66 UL94-V0
- ●Contact PIN(B): Brass
  Finish:Tin-plated;over Nickel

KB934-XX X D V 2 A

- Pin No.
- T:TUBE（管装）
  R:REEL（卷装）
  P:P E （袋装）
- D:DIP
  S: SMT
- R:Right Angle
  V:Vertical
- Mold No.
- Version

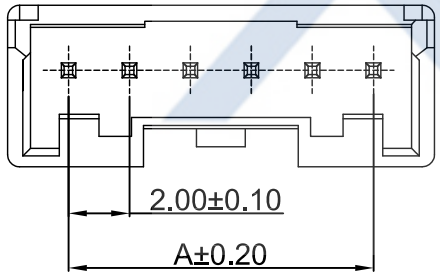

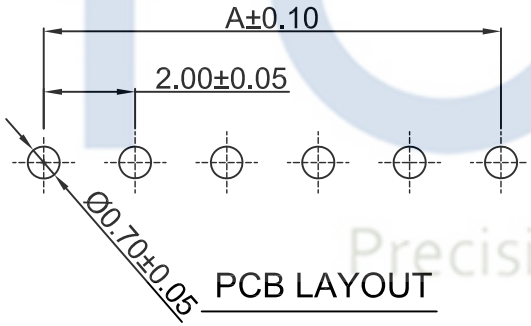

PCB LAYOUT



7~9PIN



10~16PIN

Poles	Dimensions(mm)	
	A	B
02	2.00	6.00
03	4.00	8.00
04	6.00	10.00
05	8.00	12.00
06	10.00	14.00
07	12.00	16.00
08	14.00	18.00
09	16.00	20.00
10	18.00	22.00
11	20.00	24.00
12	22.00	26.00
16	30.00	34.00

XYCO Precision Connectors

XYCO 东莞市轩业电子科技有限公司
TEL: 0769-8297 9981/2/3 http://www.XYCO.com.cn

DATE 日期	VER 版本	CHANGE HISTORY 變更歷史	CHANGED NAME 修改後料號	DRAWING 變更者
2016-08-12	A		KB934-XXXDV2A	Devin

TOLERANCE 公 差	.X=±0.30 .XX=±0.20 .XXX=±0.10	DRAWING 設計者	Devin
		CHECKED 審查	Thomas
		APPROVED 核准	William

KB934-XXXDV2A	
PART NO. 料號	
DWG NO. 圖號	PE1906001A

UNIT 單位	mm
PRODUCT NAME 產品名稱	PA PH2.0mm Wire To Board DIP Vertical Wafer