


DRAWING FOR CUSTOMER

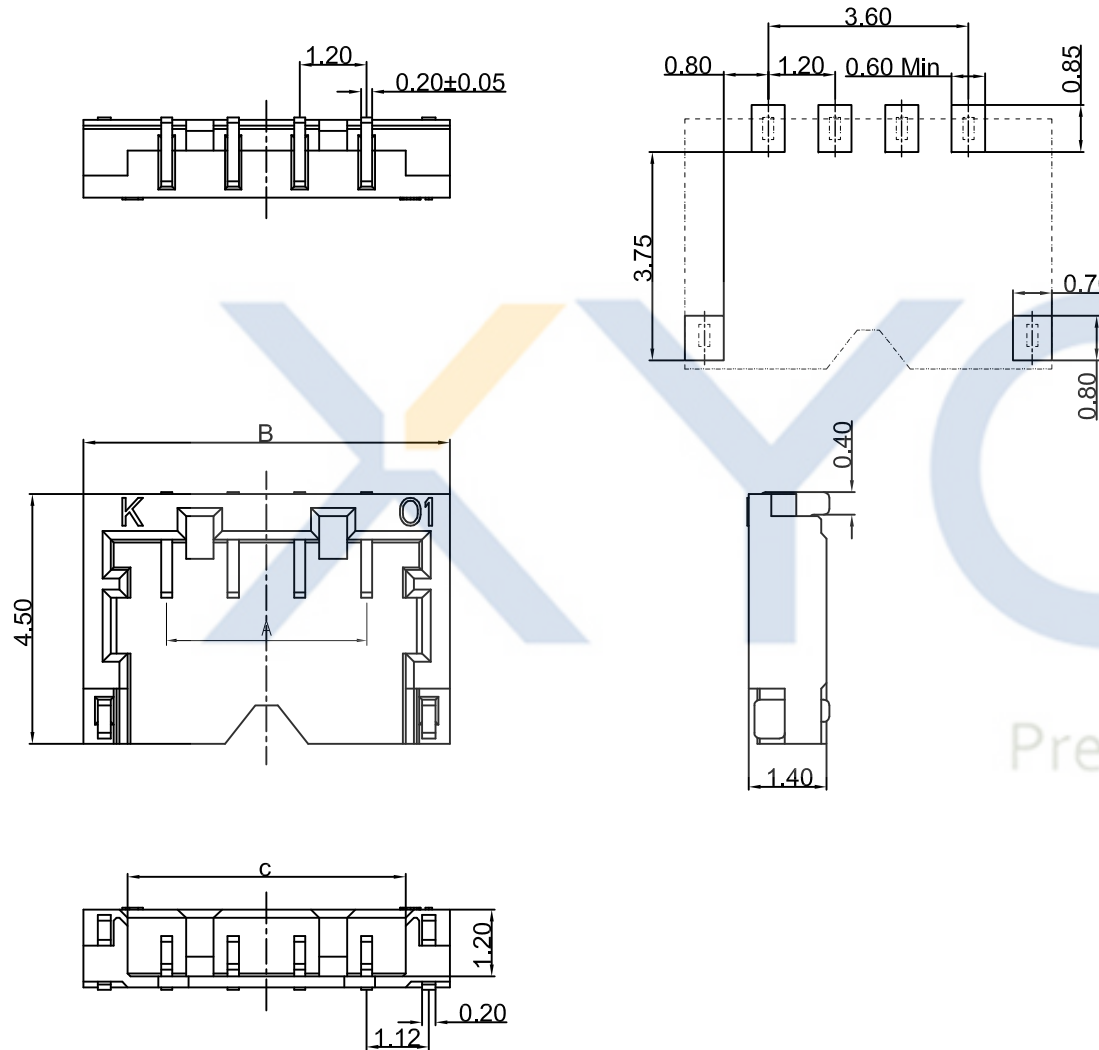

- SPEC.:
- Rated Voltage:50V AC,DC
- Rated Current:1.5A AC,DC
- Withstand Voltage:500V AC/minute
- Contact Resistance:20mΩ max
- Insulation Resistance:100MΩ min
- Temperature Range:-25℃~+85℃

- Wafer
- Insulator:PA9T UL 94V-0
- Contact:Phosphor Bronze
- Fitting Nait:Brass
- Plating:
Contact:Gold Flash plated
Fitting Nait:Tin Plated

KB1202- XX X S R 5 A

Pin No.

T:TUBE 管裝
R:REEL 卷裝
P:PE 袋裝

Version

Mold No.

R:Right angle
V:Verical

S:SMT
D:DIP

Poles	Dimensions		
	A	B	C
2	1.20	4.30	2.64
3	2.40	5.50	3.84
4	3.60	6.70	5.04
5	4.80	7.90	6.24
6	6.00	9.10	7.44
7	7.20	10.30	8.64

XYCO PRECISION CONNECTORS

TEL: 0769-8297 9981/2/3 <http://www.XYCO.com.cn>

2015-07-17		A	KB1202-XXXXSR5A		John	KB1202-XXXXSR5A		UNIT		PRODUCT NAME		JST ACHSS 1.2mm Wire To Board SMT Right Angle WAFER
DATE	VER	CHANGE HISTORY	CHANGED NAME	DRAWING	TOLERANCE	DRAWING	DESIGNER	PART NO.	料號	mm	產品名稱	
日期	版本	變更歷史	修改後料號	變更者	.X=±0.30 .XX=±0.20 .XXX=±0.10	CHECKED	設計者	DWG NO.	圖號	mm		
						APPROVED	John	PE1808008A				
						核淮	Thomas					
							William					