
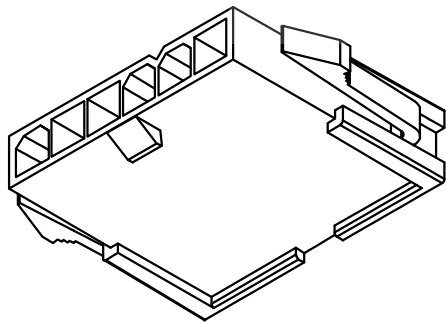
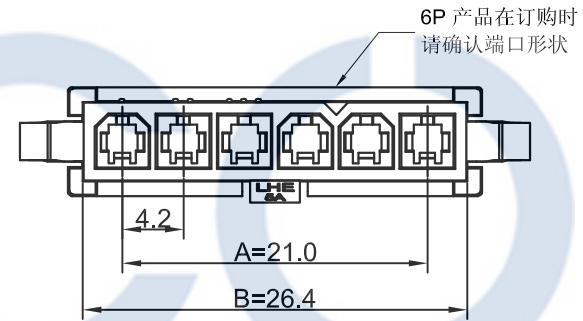
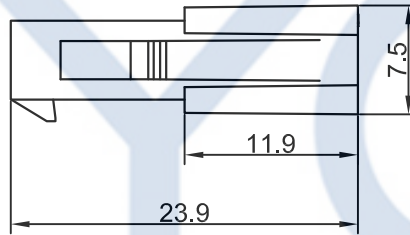
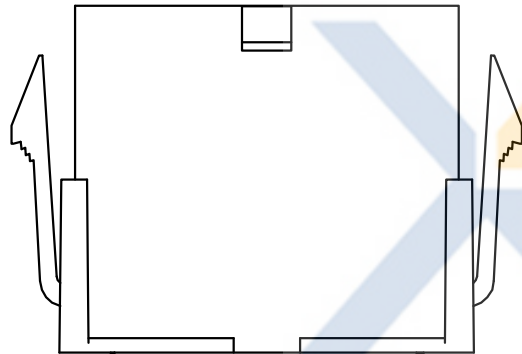


DRAWING FOR CUSTOMER

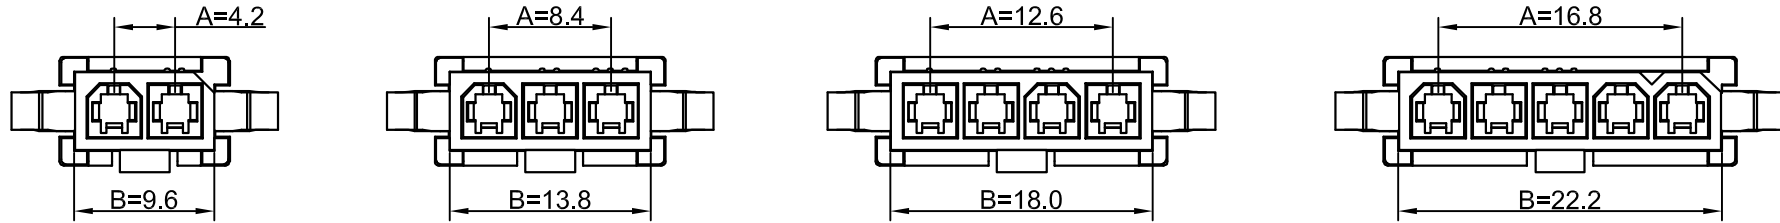

■SPEC.:

- Rated Voltage:300V AC,DC
- Rated Current:9A AC,DC
- Withstand Voltage:1500V AC/minute
- Insulation Resistance:1000MΩ min
- Contant Resistance:15mΩ Max.
- Temperature Range:-25℃~+85℃

■Notes:

- Material:Nylon66 UL94-V0/V2
- Color:TP:Transparent
- BK:Black

KB971- XX H L 3 A-XX



Poles	Dimensions(mm)	
	A	B
2	4.20	9.60
3	8.40	13.80
4	12.60	18.00
5	16.80	22.20
6	21.00	26.40

XYCO PRECISION CONNECTORS

TEL: 0769-8297 9981/2/3 <http://www.XYCO.com.cn>

2013-07-30	A		KB971-XXHL3A-XX	Devin
DATE 日期	VER 版本	CHANGE HISTORY 变更历史	CHANGED NAME 修改后料号	DRAWING 变更者

TOLERANCE 公差	DRAWING 设计者	Devin
.X=±0.30 .XX=±0.20 .XXX=±0.10	CHECKED 审查	Thomas
	APPROVED 核准	William

KB971-XXHL3A-XX	
PART NO. 料号	
DWG NO. 图号	PE1903006A

UNIT	mm
PRODUCT NAME 产品名称	

5559 4.2mm Single Row Housing With Lock-Female
