


DRAWING FOR CUSTOMER

- SPEC.:
- Rated Voltage:600V AC,DC
 - Rated Current:9A AC,DC
 - Withstand Voltage:1500V AC/minute
 - Insulation Resistance:1000MΩ min
 - Contant Resistance:20mΩ Max.
 - Temperature Range:-25℃~+85℃

- Notes:
- Material:Nylon66 UL94-V2
 - Color:WH(White),BK(Black)


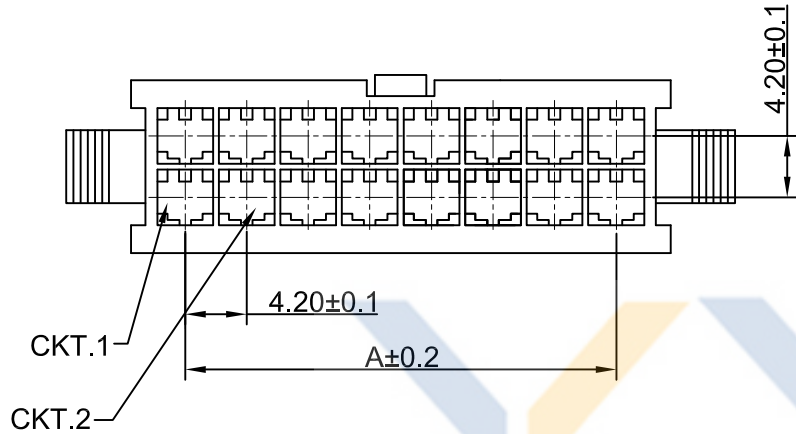


KB971-D XX H L 5 A -XX

Double row
Pin No.
Housing
With Lock

Color
Version
Mold No.

Poles	Dimensions	
	B	A
2*1	—	5.50
2*2	4.20	9.70
2*3	8.40	13.90
2*4	12.60	18.10
2*5	16.80	22.30
2*6	21.00	26.50
2*7	25.20	30.70
2*8	29.40	34.90
2*9	33.60	39.10
2*10	37.80	43.30
2*11	42.00	47.50
2*12	46.20	51.70

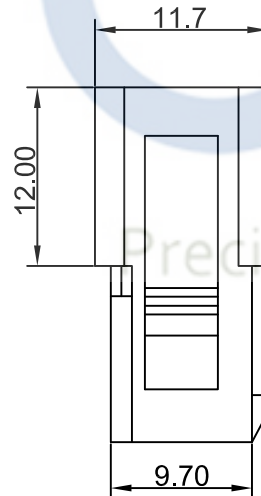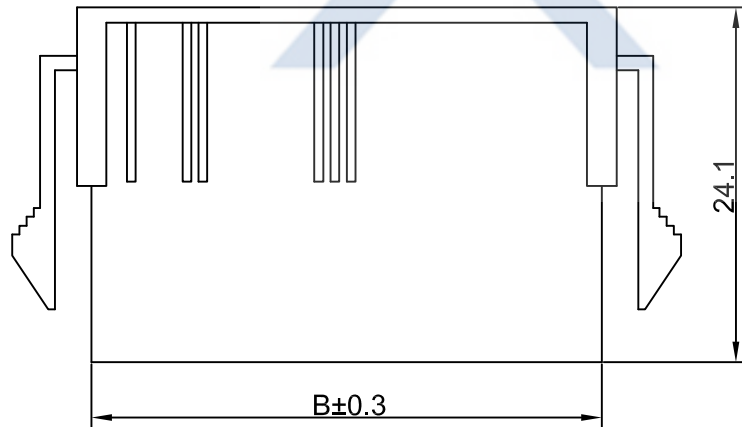

XYCO PRECISION CONNECTORS

TEL: 0769-8297 9981/2/3 <http://www.XYCO.com.cn>

				TOLERANCE 公差		DRAWING 设计者		John		KB971-DXXHL5A-XX	
2013-07-30		A		.XX=±0.30 .XX=±0.20 .XXX=±0.10		CHECKED 审查		Thomas		PART NO. 料号	
DATE 日期	VER 版本	CHANGE HISTORY 变更历史	CHANGED NAME 修改后料号	DRAWING 变更者	APPROVED 核准		William		DWG NO. 图号	PE1811013A	UNIT 单位
1	2	3	4	5	6	7	8	9	10	11	12

mm	PRODUCT NAME 产品名称	MOLEX 4.2mm Double Row Housing with lock-Female
----	----------------------	--