


DRAWING FOR CUSTOMER

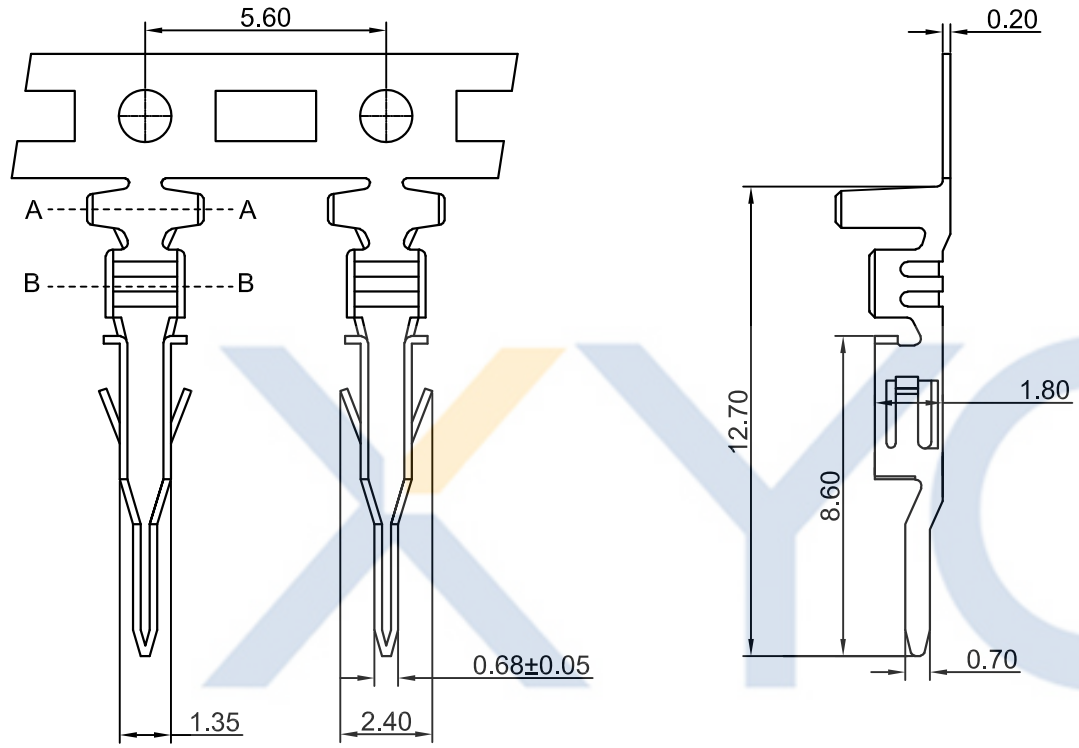


- SPEC.:
- Rated Voltage:250V AC,DC
 - Rated Current:5A AC,DC
 - Withstand Voltage:1500V AC/minute
 - Contact Resistance:10mΩ max
 - Insulation Resistance:1000MΩ min
 - Temperature Range:-25℃~+85℃


- Terminal
- Material:Phosphor/Brass Bronze
 - Finish:Tin-plated, Over Nickel
 - Applicable wire:AWG#20~24

KB9302-XXXT7A

1:All plated	Version
2:Half plated	
Plating	
0: Tin-plat	Terminal
1: Gold Plat1u"	
2: Gold Plat3u"	
3: Gold Plat5u"	Mold No.



Section:A-A



Section:B-B

XYCO 东莞市轩业电子科技有限公司
 TEL: 0769-8297 9981/2/3 <http://www.XYCO.com.cn>

DATE 2015-10-15		VER A	CHANGE HISTORY	CHANGED NAME	DRAWING	TOLERANCE	DRAWING	Devin	KB9302-XXT7A		UNIT	mm	PRODUCT NAME	43031 PH3.0mm Wire To Wire Terminal-Male
日期	版本	公差				設計者	PART NO. 料號		mm					
2015-10-15	A	.X=±0.30 .XX=±0.20 .XXX=±0.10				Thomas	DWG NO. 圖號		PE2109018A					
日期	版本	變更歷史	修改後料號	變更者	核准	William								