


DRAWING FOR CUSTOMER

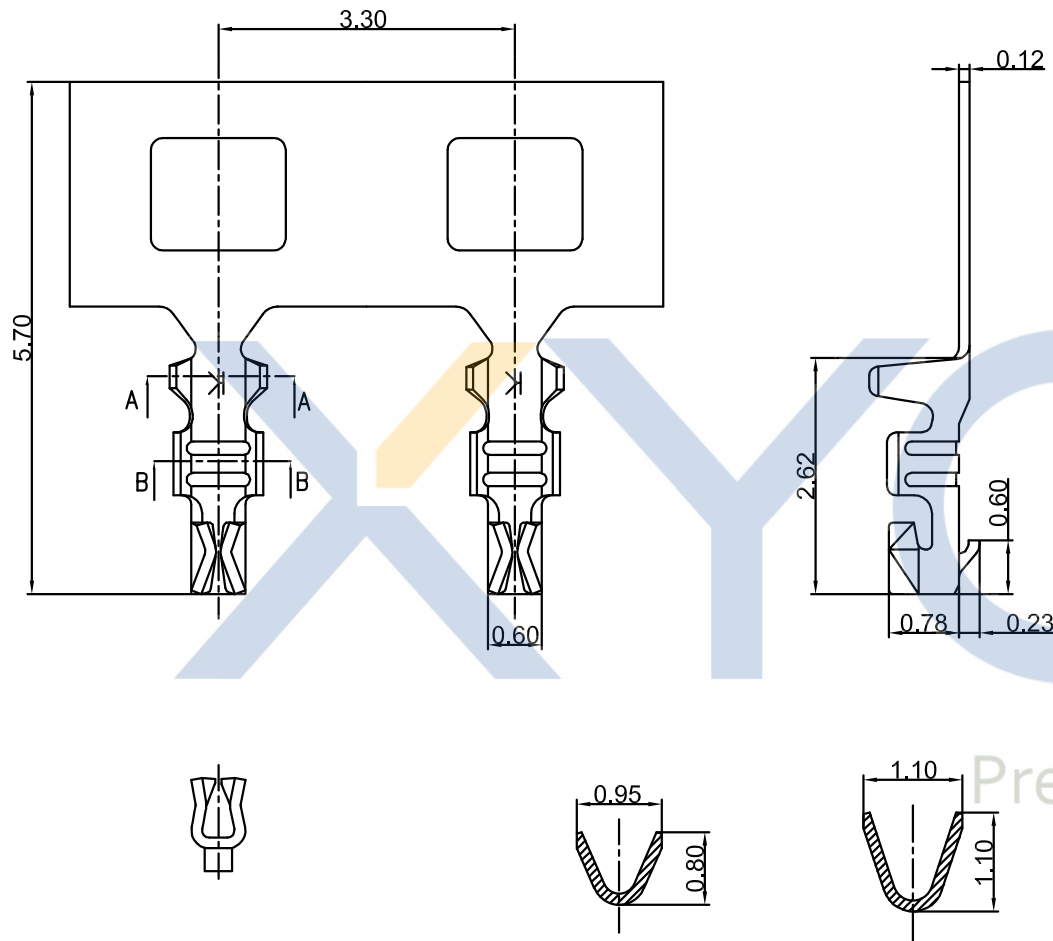

■ Specifications:

- Rated Voltage: 30V AC,DC
- Rated Current: 0.5A AC,DC
- Withstand Voltage: 200V AC/minute
- Contact Resistance: 20mΩ, (MAX.)
- Insulation Resistance: 100MΩ, (MIN.)
- Temperature Range: -25°C~+85°C

■ Terminal:

- Material: Phosphor Bronze
- Applicable Wire: AWG32#

Insulation O.D: 0.60mm (MAX)

Finish: Tin-plated or Gold 1u" plated contact area
Q'TY/Reel: 25000PCS

KB802-X X T X A

10: Tin plated
11: Gold plated

Terminal

Version

Mold No.

SECTION: B-B

SECTION: A-A

XYCO PRECISION CONNECTORS

TEL: 0769-8297 9981/2/3 <http://www.XYCO.com.cn>

| | | | | | | | | | | | | | | | | | | |
|------------|-----------|------------------------|-----------------------|----------------|-----|-------------------------------------|----------------|-----|---------------|---------|------------|--|----------|--|----------------------|--|-----------------------------|--|
| 2016-03-30 | | A | | KB802-XXTXA | 譚火秦 | TOLERANCE 公差 | DRAWING 設計者 | 譚火秦 | KB802-XXTXA | | UNIT 單位 | | mm | | PRODUCT NAME 產品名稱 | | JST SUH PH0.8 Wire to Board | |
| DATE 日期 | VER 版本 | CHANGE HISTORY 變更歷史 | CHANGED NAME 修改後料號 | DRAWING 變更者 | | .X=±0.30 .XX=±0.20 .XXX=±0.10 | CHECKED 審查 | 彭太坤 | PART NO. 料號 | | | | Terminal | | | | | |
| | | | | | | | APPROVED 核准 | 譚宏 | DWG NO. 圖號 | PE1904A | | | | | | | | |