DRAWING FOR CUSTOMER

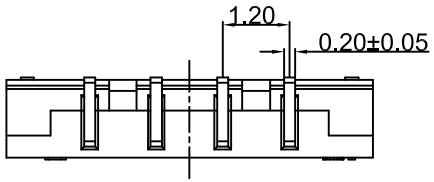

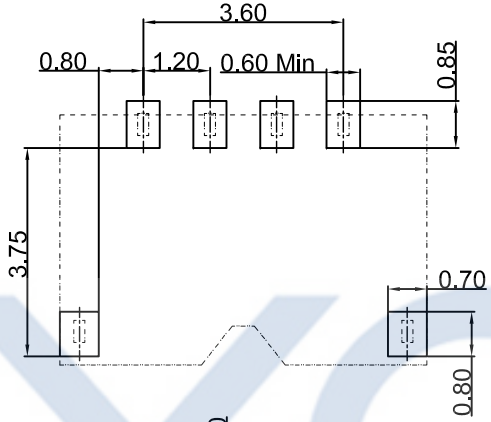

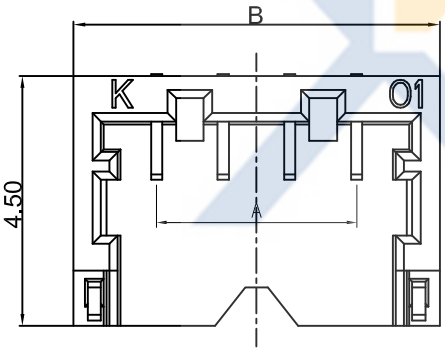



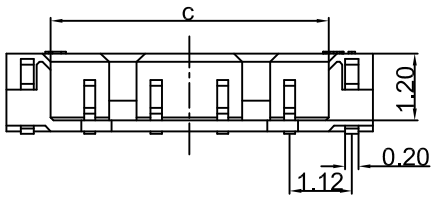

■SPEC.:
- ●Rated Voltage:50V AC,DC
- ●Rated Current:1.5A AC,DC
- ●Withstand Voltage:500V AC/minute
- ●Contact Resistance:20mΩ max
- ●Insulation Resistance:100MΩ min
- ●Temperature Range:-25℃~+85℃

■Wafer
- ●Insulator:PA9T UL 94V-0
- ●Contact:Phosphor Bronze
- ●Fitting Nait:Brass
- ●Plating:
  - Contact:Gold Flash plated
  - Fitting Nait:Tin Plated

KB1202- XX X S R 5 A

- Pin No.
- T:TUBE 管裝
- R:REEL卷裝
- P:PE 袋裝
- S:SMT
- D:DIP
- R:Right angle
- V:Verical
- Mold No.
- Version

Precision Connectors

Poles	Dimensions		
	A	B	C
2	1.20	4.30	2.64
3	2.40	5.50	3.84
4	3.60	6.70	5.04
5	4.80	7.90	6.24
6	6.00	9.10	7.44
7	7.20	10.30	8.64

DATE 日期	VER 版本	CHANGE HISTORY 變更歷史	CHANGED NAME 修改後料號	DRAWING 變更者
2015-07-17	A		KB1202-XXXSR5A	Devin

TOLERANCE 公 差: .X=±0.30, .XX=±0.20, .XXX=±0.10

DRAWING 設計者: Devin
CHECKED 審查: Thomas
APPROVED 核准: William

KB1202-XXXSR5A

PART NO. 料號

DWG NO. 圖號: PE1808008A

UNIT 單位: mm

PRODUCT NAME 產品名稱: ACHSS 1.2mm Wire To Board SMT Right Angle WAFER

XYCO PRECISION CONNECTORS

TEL: 0769-8297 9981/2/3 http://www.XYCO.com.cn