
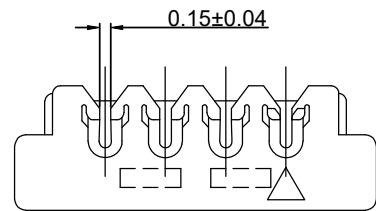
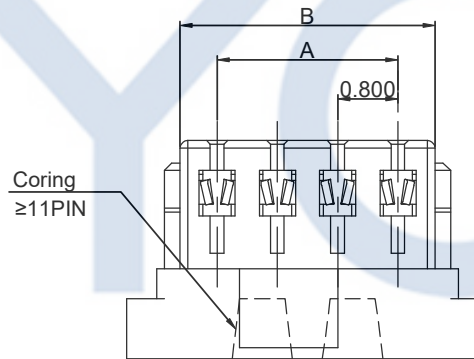
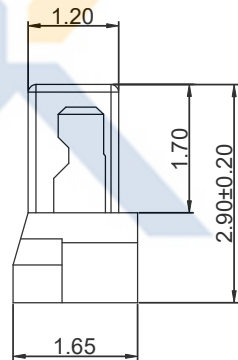
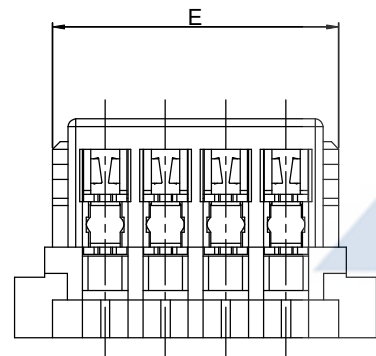
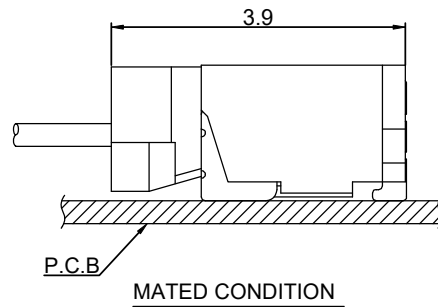


DRAWING FOR CUSTOMER

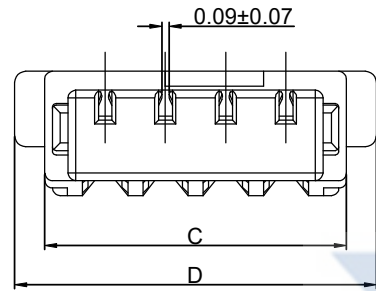

- SPEC.:
- Rated Voltage:30V AC,DC
 - Rated Current:0.5A AC,DC(AWG#32)
 - Withstand Voltage:200V AC/minute
 - Contact Resistance:30mΩ max
 - Insulation Resistance:100MΩ min
 - Temperature Range:-25℃~+85℃

- Material:
- Insulator:Thermal plastic, UL94V-0
 - Contact:Copper Alloy
 - Applicable Wire:AWG#32
 - Insulation O.D:0.38±0.02mm

KB801-XX H E XX T 5 A

Pin No. _____
 Housing _____
 Ear _____
 10: Tin plated
 11: Gold Flash

Version _____
 Mold No. _____
 Terminal _____

Poles	Dimensions(mm)					Poles	Dimensions(mm)				
	A	B	C	D	E		A	B	C	D	E
02	0.80	1.78	2.40	3.20	2.20	13	9.60	10.58	11.20	12.00	11.00
03	1.60	2.58	3.20	4.00	3.00	14	10.40	11.38	12.00	12.80	11.80
04	2.40	3.38	4.00	4.80	3.80	15	11.20	12.18	12.80	13.60	12.60
05	3.20	4.18	4.80	5.60	4.60	16	12.00	12.98	13.60	14.40	13.40
06	4.00	4.98	5.60	6.40	5.40	17	12.80	13.78	14.40	15.20	14.20
07	4.80	5.78	6.40	7.20	6.20	18	13.60	14.58	15.20	16.00	15.00
08	5.60	6.58	7.20	8.00	7.00	19	14.40	15.38	16.00	16.80	15.80
09	6.40	7.38	8.00	8.80	7.80	20	15.20	16.18	16.80	17.60	16.60
10	7.20	8.18	8.80	9.60	8.60	21	16.00	16.98	17.60	18.40	17.40
11	8.00	8.98	9.60	10.40	9.40	22	16.80	17.78	18.40	19.20	18.20
12	8.80	9.78	10.40	11.20	10.20	---	---	---	---	---	---

XYCO 东莞市轩业电子科技有限公司
 TEL: 0769-8297 9981/2/3 <http://www.XYCO.com.cn>

2014-06-22		A		KB801-XXHEXXT5A	Devin	TOLERANCE 公差	DRAWING 設計者	Devin	KB801-XXHEXXT5A	
DATE 日期	VER 版本	CHANGE HISTORY 變更歷史	CHANGED NAME 修改後料號	DRAWING 變更者		.X=±0.30 .XX=±0.20 .XXX=±0.10	CHECKED 審查	Thomas	PART NO. 料號	UNIT 單位
							APPROVED 核准	William	DWG NO. 圖號	mm
									PE1908003A	PRODUCT NAME 產品名稱

SUR PH0.80mm Wire To Board
 Connector Ear